



# HUME DOORS & TIMBER

100% Australian Owned



# 2021 PRODUCT CATALOGUE

Version 1.00



# WELCOME TO HUME DOORS & TIMBER



*"When you are designing a space it is the attention to every detail that elevates a space from every day to an experience. The doors you select can have a huge impact on how people transition from one space to another, as well as how the spaces integrate.*

*They consolidate the style of your home and provide a quality experience both in touch and sight."*

*- Naomi Findlay*

**NAOMI FINDLAY**

*Creating healthy, wealthy & beautiful spaces.*

## HUME'S VALUES

- To innovate and make a difference in your home
- To continue to build valued relationships with staff, suppliers and distributors
- To continue to improve on our environmental sustainability and recycling

Hume Doors & Timber is the nation's largest 100% Australian owned timber door manufacturer with over 60 years of proud history. Hume Doors will always stand by its family based values and exceptional customer service.

Whether leading the way in sustainability, innovation or design, Hume Doors & Timber remains committed to developing outstanding products for the Australian market.

Hume Doors & Timber complies with Australian Standard AS 2688-2017 for the manufacture and importation of timber doors.



Scan QR code to view our 60 year history video



# CONTENTS

## ENTRANCE DOORS

- 6 Savoy 1200
- 7 Verve
- 8 Savoy 820
- 10 Linear
- 12 Joinery
- 14 Illusion
- 15 Vaucluse
- 16 Newington
- 18 Regency
- 19 Vaucluse Premier
- 20 Carringbush
- 21 Nexus
- 22 Glass Opening

## ENTRANCE SYSTEMS

- 23 Pivot Frames
- 24 Standard Frames
- 25 Weatherguard Frames
- 26 Alfresco Multifold

## BUSHFIRE RESISTANT DOORS & FRAMES

- 27 BAL (Bushfire Attack Level)
- 28 BAL19 & 29 Doors
- 29 BAL19 & 29 BAL Merbau Weatherguard Frames
- 30 BAL40 Doors
- 31 BAL40 Merbau Weatherguard Frames

## INTERNAL BARN DOORS

- 32 Frontier Standard Barn Doors
- 33 Frontier Ultimate Barn Doors
- 34 Frontier Rustic Barn Doors
- 35 Frontier Track System

## INTERNAL DOORS

- 36 Hampton
- 37 Strata
- 38 Humecraft
- 40 Sorrento
- 41 Joinery
- 42 Linear
- 44 Moulded Panel Woodgrain Skin
- 45 Moulded Panel Smooth Skin
- 46 Accent

## FLUSH DOORS

- 47 Internal Honeycomb core
- 47 External Honeycomb core
- 47 Solicore (SCX1)
- 47 Blockboard (STPC)

## INTERNAL SYSTEMS

- 48 Cavity Units
- 49 Cavity Units Additional Extras
- 49 Evolution Premium
- 50 Smartrobe
- 52 Bi-Fold
- 53 Multi-Fold
- 54 Pre-Hung

## COMMERCIAL

- 56 Fire Doors
- 56 Commercial Products
- 57 Steel Door Frames

## GLASS

- 58 Glazing Options

## TIMBER

- 60 Fibre-Cement Products
- 61 Timber Mouldings Profiles

## EXTRAS

- 4 Environmental Commitment
- 5 Construction Types
- 55 How to Hang a Door
- 62 Guarantee Doors
- 62 Steel Door Frame Warranty
- 63 Overhead Protection
- 63 Care & Maintenance
- 64 Contact Details

## Key for Specifications tables

	<b>DOOR CONSTRUCTION TYPE</b>	Denotes the type of door construction. For more information go to page 5
	<b>DOOR SOUND RATING</b>	Door sound rating. Refer to our website for further information: <a href="http://www.humedoors.com.au/downloads">www.humedoors.com.au/downloads</a>
	<b>BUSHFIRE ATTACK LEVEL</b>	Bushfire Attack Level Rating. For more information go to page 27
	<b>WEIGHT</b>	Door weight in kg



# ENVIRONMENTAL COMMITMENT

Hume Doors & Timber is committed to operating its entire business processes in an environmentally sustainable manner at all times. Our goal is to be regarded as an environmentally responsible corporate citizen that practices environmental stewardship and provides our valued customer base with complete confidence that our products have been produced in accordance with applicable independent environmental standards.

- Reusing and recycling by-products, packaging and waste material
- Reducing the level of packaging and consumables used
- Capturing, storing and using rainwater for our water needs
- Maximise transport loads, thus reducing energy requirements

We embrace environmental awareness, protection and enhancement.

Timber is a fully sustainable resource that is non-toxic, reusable and versatile. The continued growth and planting of forests aid in the reduction of carbon dioxide. The future of our products, business, industry and customer satisfaction is directly linked to the sustainable management of the world's forests.

Our manufacturing and distribution processes have been designed to minimise our environmental footprint by, among other things:

- Utilising energy to its maximum efficiency
- Subscribing to renewal energy sources (where possible)
- Utilising recycled product (where possible)
- Organising our transportation routes to minimise energy requirements of our vehicle fleet
- Providing reliable, long lasting products that are backed by a 5 year guarantee
- Ensuring our suppliers of raw material products are accredited by appropriate independent, third party environmental stewardship programs including FSC (Forest Stewardship Council), PEFC (Programme for the Endorsement of Forest Certification Schemes), AFS (Australian Forestry Standard), etc and hold to the principles of and guidelines contained within these programs.



The mark of responsible forestry

### FSC® CERTIFICATION

Hume Doors & Timber (Aust) Pty Ltd is a certified member of the Forest Stewardship Council® (SGS-CoC-009377)



The mark of responsible forestry

### FSC® CERTIFICATION

Hume Doors & Timber (Qld) Pty Ltd is a certified member of the Forest Stewardship Council® (SGS-CoC-009405)



### PEFC™ CERTIFICATION

Hume Doors & Timber (Aust) Pty Ltd is a member of the Programme for the Endorsement of Forest Certification Schemes (AU17/05236)





<p><b>Engineered Joinery</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>INFILL PANEL: Glass or Solid Infill</li> <li>FACE MATERIAL: Selected face material</li> <li>BOTTOM RAILS</li> </ul>	<p><b>Solid HMR MDF Core (DB)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: Medium density fibreboard core. Moisture resistant (HMR MDF)</li> <li>FACE MATERIAL: Selected face material</li> <li>RAILS: Bottom rail</li> </ul>	<p><b>Honeycomb Core (Hollowcore X1)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: High Density cellular core</li> <li>LOCK BLOCK</li> <li>FACE MATERIAL: Selected face material</li> </ul>	<p><b>Solicore Particleboard Core (SCX1)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: Particle board core highly moisture resistant</li> <li>FACE MATERIAL: Selected face material</li> </ul>
<p><b>BAL 40 Construction</b></p> <ul style="list-style-type: none"> <li>TOP RAIL: 18mm Hardwood</li> <li>STILES: 32mm Meranti</li> <li>CORE: (TVC) Vermiculite Core</li> <li>FACE MATERIAL: Selected Face Material</li> <li>BOTTOM RAIL: 32mm Meranti</li> </ul>	<p><b>Frontier Premium Hollow Core (SG)</b></p> <ul style="list-style-type: none"> <li>RAILS: 180mm top rail</li> <li>STILES</li> <li>LOCK BLOCK</li> <li>CORE: Maximum Density cellular core</li> <li>FACE MATERIAL: Selected face material double thickness</li> </ul>	<p><b>Frontier Ultimate Solid Infill Core</b></p> <ul style="list-style-type: none"> <li>RAILS: 180mm top rail</li> <li>STILES</li> <li>INFILL PANEL: Solid Infill</li> <li>FACE MATERIAL: PC MDF for paint</li> </ul>	<p><b>Frontier Rustic Solid Infill Core</b></p> <ul style="list-style-type: none"> <li>RAILS: 180mm top rail</li> <li>STILES</li> <li>INFILL PANEL: Solid Infill</li> <li>FACE MATERIAL: PVC Wrap</li> </ul>
<p><b>Hampton Construction</b></p> <ul style="list-style-type: none"> <li>STILES &amp; TOP RAIL: Finger Joint Timber</li> <li>CORE: Particle board core highly moisture resistant</li> <li>FACE MATERIAL: Pre-primed Face Material</li> <li>BOTTOM RAILS: Finger Joint Timber</li> </ul>	<p><b>Honeycomb Core (Hollow Core H1)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: High Density cellular core</li> <li>LOCK BLOCK</li> <li>FACE MATERIAL: Selected face material</li> </ul>	<p><b>Solid HMR MDF Core (HV)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: Medium density fibreboard core. Moisture resistant</li> <li>FACE MATERIAL: Selected face material</li> <li>RAILS: Bottom rail</li> </ul>	<p><b>Honeycomb Core (Hollowcore SG) 6mm Skin</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: Maximum Density cellular core</li> <li>LOCK BLOCK</li> <li>FACE MATERIAL: Selected face material double thickness (6mm Skin)</li> </ul>
<p><b>Honeycomb Core Large Cell (Hollow Core Moulded Panel)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: High Density cellular core</li> <li>LOCK BLOCK</li> <li>FACE MATERIAL: Moulded Panel</li> </ul>	<p><b>Solicore Particleboard Core (SCX1 Moulded Panel)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: Particle board core highly moisture resistant</li> <li>FACE MATERIAL: Moulded Panel</li> </ul>	<p><b>Solicore Particleboard Core (SCX1 PC MDF)</b></p> <ul style="list-style-type: none"> <li>STILES AND RAILS</li> <li>CORE: Particle board core highly moisture resistant</li> <li>FACE MATERIAL: Pre-primed Face Material</li> </ul>	<p><b>Solid Timber Pine Core (STPC Blockboard)</b></p> <ul style="list-style-type: none"> <li>CORE: Timber (kiln dry) blockboard core</li> <li>FACE MATERIAL: Selected face material</li> </ul>



ENTRANCE DOORS  
SAVOY 1200

Grand, King-sized & Stunning

The Savoy 1200 range is engineered using joinery construction techniques, featuring veneered laminated timber stiles and rails. Crafted from select timbers and available with a range of glass options to suit your style.



XS24



XS26



XS28



XS45

Face Options



SPM (standard)

Tassie Oak

Merbau

Blackbutt

Glass Options



Clear

Cathedral

Grey Tint

Translucent

Africana

Low E

Geostep

Rice Paper

Specifications

	Engineered Joinery	
	Rw:29	STC:30
	BAL12.5	
	48kg	

- Standard Door Size: 2040x1200x40, 2340x1200x40
- Check with your Hume state office for made to order



ENTRANCE DOORS  
**VERVE**

Sophisticated, Crisp & Neat

The Verve range has been designed with sleek glass panels, making for the finest in contemporary design. An extensive range of glass options creates endless possibilities in style.



VER1



VER4



VER6



VER11

Face Options



DuraXP (standard)

SPM

Tassie Oak

Merbau

Blackbutt

Glass Options



Clear

Cathedral

Grey Tint

Translucent

Geostep

Low E

Rice Paper

Specifications

	Solid HMR MDF Core (DB)	
	Rw:31	STC:31
	BAL12.5	
	40kg	

- Standard Door Size: 2040x820x40
- Check with your Hume state office for made to order





ENTRANCE DOORS  
SAVOY 820

Stunningly Eye Catching



The Savoy 820 range is engineered using joinery construction techniques featuring veneered laminated timber stiles and rails. Crafted from select timbers and available with a range of glass options to suit your style.





# ENTRANCE DOORS SAVOY 820



XS2



XS3



XS4



XS11



Optional raised panel and moulding to suit:  
XS2, XS3, XS4



XS24



XS26







XS28



XS45

## Specifications


	Engineered Joinery	
	Rw:29	STC:30
	BAL12.5	
	30kg	

- Standard Door Size: 2040x820x40
- Standard Sidelite Size: 2040x400x40
- Check with your Hume state office for made to order

## Face Options



SPM (standard)



Tassie Oak  
(XS11, 24, 26, 28, 45)



Merbau  
(XS11, 24, 26, 28, 45)



Blackbutt  
(XS11, 24, 26, 28, 45)

## Glass Options



Clear



Cathedral



Grey Tint



Translucent



Africana



Low E



Geostep



Rice Paper

For more glass designs refer to Glazing Options table on page 58




Our designers have been inspired by modern European trends which have shaped the Linear Range of doors. This unique range can showcase the natural beauty of timber with the innovation of contrasting grains or can be painted, for that fresh & stylish feel.



XLR120



XLR130

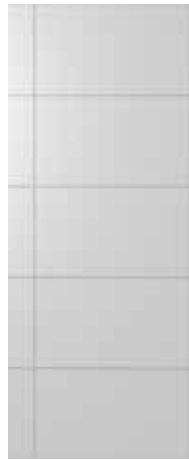

XLR140



XLR150



XLR160



XLR170



XLR300




XLR310



XLR500




XLR600

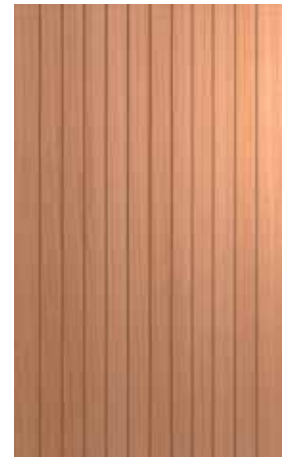

XLR500 (1200)

### Face Options



DuraXP (standard)  
XLR120, 130, 140, 170



SPM (standard)  
XLR150, 160, 300, 310, 500, 600

### Glass Options



Clear



Cathedral



Grey Tint



Translucent



Africana

### Specifications

	Solid HMR MDF Core (DB)	
	Rw:30	STC:29
	BAL12.5	
	40kg (820mm)	58kg (1200mm)

- Standard Door Size: 2040x820x40
- Routed: Both sides
- Not suitable for rebated pairs
- Alignment of horizontal rout is not guaranteed for pairs
- Check with your Hume state office for made to order





The Joinery range is the ideal match to traditional architecture. Crafted from select timbers and available with a range of glass options to suit your style. This range features an engineered joinery construction system, which utilises traditional joinery methods as well as incorporating modern techniques. Note: JST1 doors with clear glass includes a safety decal strip centre of the glass panel.



JST1



JST11



JST4



JST12



JST2



JST6



JST10



JST5




XL10

Face Options



SPM  
(standard)



Tassie Oak  
JST1, 11, 2



Merbau  
JST1,11, 2



Blackbutt  
JST1, 11, 2

Specifications

	Engineered Joinery	
	Rw:29	STC:30
	BAL12.5	
	30kg	

Design Code	Standard Size (mm)
JST1,10	2040x620/720/770/820x40
JST4, 6	2040x720x40, 2040x820x40
JST2, XL10	2040x820x40
JST5, 11, 12	2040x400x40

■ Check with your Hume state office for made to order

Glass Options



Clear



Clear Laminated



Cathedral



Double Glaze Clear



Grey Tint



Translucent



Africana



Double Glaze Frost



Low E



Geostep



Rice Paper



ENTRANCE DOORS  
ILLUSION

Bold, Individual & Dreamy

The Illusion range has inserts that appear to float, these doors make for a stunning impression, all the while allowing for an abundance of light to enter into your home. Choose from Clear, Frost, Grey or Africana glass to complete the illusion.



XIL1



XIL6



XIL21



XIL26

Face Options



SPM

Glass Options



Clear




Grey Tint



Frost



Africana



Translucent

Specifications

	Engineered Joinery	
	Rw:29	STC:30
	BAL12.5	
	30kg (820mm)	48kg (1200mm)

- Standard Door Size: 2040x820x40
- Standard Door Size: 2040x1200x40
- Check with your Hume state office for made to order
- Chrome bolts are visible to inside of timber floating panels for standard doors
- Timber floating panels remain the same size and are glued to glass for made to order doors
- Sidelite option refer to Joinery Range(JST11) page 12






# ENTRANCE DOORS VAUCLUSE

## Craftsmanship & Simplicity

The Vaucluse Range is of the highest quality with a variety of designs to match any architectural frontage. Detailed carved patterns to the external faces and smooth internal faces make for simplicity in design.



XV1

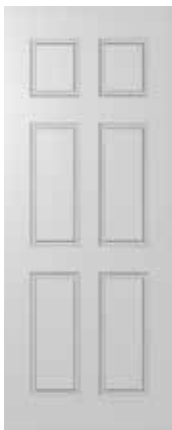

XV4




XV9



XV10



XV14

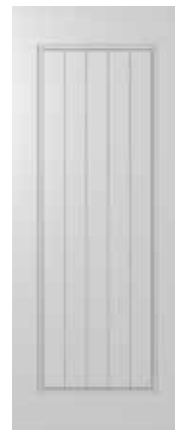

XV18



XV20

### Face Options



DuraXP  
(standard)

SPM

- Standard Door Size: 2040x820x40
- Routed: One side
- Double sided rout available as an optional extra
- Sidelite option refer Newington (XN9 & XN14) page 16
- Check with your Hume state office for made to order

### Specifications

	Solid HMR MDF Core (DB)	
	Rw:30	STC:29
	BAL12.5	
	40kg	



ENTRANCE DOORS  
NEWINGTON

Popular, Attractive & Versatile



The Newington range has a popularity that is a testament to its everlasting appeal and unmatched adaptability. The choice of dazzling designs, an array of glass options and matching sidelites provide limitless choices for you to create the look.



# ENTRANCE DOORS NEWINGTON



XN1



XN2



XN5



XN11



XN6



XN12



XN7



XN9



XN14



XN16

## Specifications

	Solid HMR MDF Core (DB)	
	Rw:31	STC:31
	BAL12.5	
	40kg	

- Standard Door Size: 2040x820x40
- Standard Sidelite Size:  
2040x200x40 (XN14),  
2040x400x40 (XN9, XN11, XN12)
- Check with your Hume state office for made to order


## Face Options




DuraXP (standard)



SPM



Tassie Oak



Merbau



Blackbutt

## Glass Options



Clear



Cathedral



Grey Tint



Translucent



Millenium Slumped



Africana



Low E



Geostep



Rice Paper





ENTRANCE DOORS  
**REGENCY**

Supreme & Classic

The Regency range offers timeless designs with substantial timber mouldings to the exterior face plus deep routed designs to both door faces. Solid construction with several glazing options available, including triple-glaze leadlight designs to complement any classically-styled home.



XR4



XR4 (1200)



XR5




XR6

Face Options



DuraXP (standard)



SPM

Glass Options



Clear



Cathedral



Grey Tint



Translucent



Africana



Low E

For more glass designs refer to Glazing Options table on page 58

Specifications

	Solid HMR MDF Core (DB)		
	Unglazed	Rw:30	STC:29
	Glazed	Rw:31	STC:31
	BAL12.5		
	40kg	58kg	
	(820mm)	(1200mm)	

- Standard Door Size: 2040x820x40
- Standard Sidelite Size: 2040x400x40
- Routed: Both sides
- Moulding: One side
- Check with your Hume state office for made to order



ENTRANCE DOORS

# VAUCLUSE PREMIER

## Premium & Superior by Design

Vaucluse Premier doors have deeply carved patterns on both sides of the door together with attractive moulding to the external side. A wide range of glass options are also available to match any decor.



Image supplied by Maine House Interiors



### Face Options



- Standard Door Size: 2040x820x40
- Standard Sidelite Size: 2040x400x40
- Routed: Both sides
- Moulding: One side
- Check with your Hume state office for made to order

### Glass Options



For more glass designs refer to Glazing Options table on page 58

### Specifications

	Solid HMR MDF Core (DB)		
	Unglazed	Rw:30	STC:29
	Glazed	Rw:31	STC:31
	BAL12.5		
	40kg (820mm)	58kg (1200mm)	





ENTRANCE DOORS  
CARRINGBUSH

Classic & Timeless

The Carringbush is a recreation of doors from the Victorian era. These doors incorporate routed designs each side and have the warmth of detailed timber mouldings, strong cricket bat panels, ledge and scroll on the exterior door face.



XCB1

XCB2

Specifications

	Solid HMR MDF Core (DB)	
	Rw:31	STC:31
	BAL12.5	
	40kg	

- Standard Door Size: 2040x820x40
- Standard Sidelite Size: 2040x400x40
- Routed: Both sides
- Moulding: One side
- Check with your Hume state office for made to order

Face Options



DuraXP  
(standard)

SPM

Glass Options



Clear

Cathedral

Grey Tint

Translucent


Triple Glazed Leadlight Glass



Triple Glaze Argyle  
Leadlight

Triple Glaze Crystal Blue  
Leadlight

Frost Coloured Design Glass



Wysteria Frost





ENTRANCE DOORS  
NEXUS

Subtle & Stylish

The Nexus range is designed with urban architecture in mind. These smart designs are the perfect link between the cityscape and your home. The array of glass options provide limitless choices for you to create the urban look.



Specifications


	Solid HMR MDF Core (DB)	
	Rw:31	STC:31
	BAL12.5	
	40kg (820mm)	58kg (1200mm)

- Standard Door Size: 2040x820x40, 2040x1200x40 (NEX40)
- Check with your Hume state office for made to order

Face Options



Glass Options

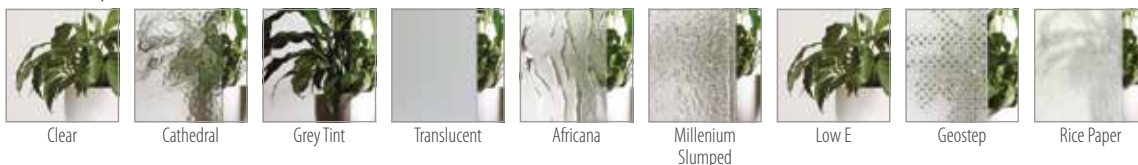



ENTRANCE DOORS

# GLASS OPENING

## Minimalistic & Functional

A classic back door design with three different styles. Available in honeycomb core or the option of solid construction. Crafted from tempered hardboard or select timbers and offered with a range of glass options to suit your style.



XF1



XF3



XF8

### Specifications

	Honeycomb (X1)			Solid HMR MDF Core (DB)/ Solicore (SCX1)	
	Rw:25	STC:25		Rw:31	STC:31
	Nil			BAL12.5	
	18kg			40kg	

- Standard Door Size: 2040x820x35, 2040x820x40
- Routed: One side (XF8 only)
- XF8 is Solid HMR MDF Core (DB) construction only
- Check with your Hume state office for made to order

### Face Options



DuraXP (standard)

SPM

Paint Grade Ply  
XF1,3

Merbau  
XF1,3

Tassie Oak  
XF1,3

### Glass Options



Clear

Cathedral

Grey Tint

Translucent

Africana

Geostep

Low E

Rice Paper




# ENTRANCE SYSTEMS PIVOT FRAMES

Make a bold statement and increase your home's street appeal with a Hume Pivot System. This assembled entry frame incorporates a heavy-duty pivot with quality fittings that allow the door to be adjusted during installation. Everything you need to make your grand entrance, perimeter seals included.

- Head**  
Made of premium timber and designed to incorporate the pivot operating system
- Door Adjustment Hole**  
Easily adjust your pivot without removing the door, so it is plumb and square
- Concealed Hydraulic Self Closer**  
Adjustable closing speed control and soft-close allow for safe closing speeds and no slamming of your door. Hold open function at 90 degrees to create a generous entrance
- Optional glazed sidelite/s or hiltite**
- Perfect for Large Doors**  
Heavy-duty pivot fittings to suit any oversized door from our extensive range of large doors
- Full Perimeter Seal**  
Pivot systems have a full perimeter seal which improves energy efficiency and reduces noise
- Bottom Seal**  
A sleek aluminium bottom seal, designed with energy efficiency in mind
- Stop Bead**  
Fitted with perimeter seal, improves energy efficiency
- Bottom Sill**  
Solid timber sill looks sleek & elegant due to a top-mounted pivot mechanism
- Factory Assembled Frame**  
Fully assembled and packaged ready for your home. Simply install and enjoy

## HANDING OF PIVOT FRAME

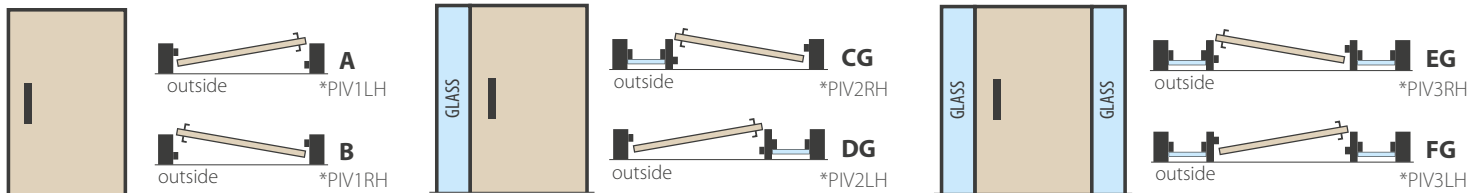

\*Victoria Configuration Codes

### DOORS NOT INCLUDED

- Allow for up to 1200 wide door
- Choose from any oversize door in our entrance range
- Door cost is additional
- We recommend ordering door and frame together to ensure perfect fit



Scan QR code to view Pivot installation video

## Specifications



BAL12.5  
(Meranti frames only)



■ Factory Assembled Frame

Fully assembled, factory fitted hinges and packaged ready for your home. Our frames have been designed to suit most openings

■ Timber Jambs & Head

Made of premium timber and designed to suit Australian conditions. Choose from primed pine, meranti or merbau to best suit your situation and door choice

■ Factory Fitted Hinges

Frame supplied with hinges


■ Durable Hardwood Bottom Sill

Made from solid timber and slanted in design. The hardwood sill is a sleek and elegant threshold that improves moisture control

■ Multiblade Rubber Seal

Provides maximum weather protection


HANDING OF FRAME

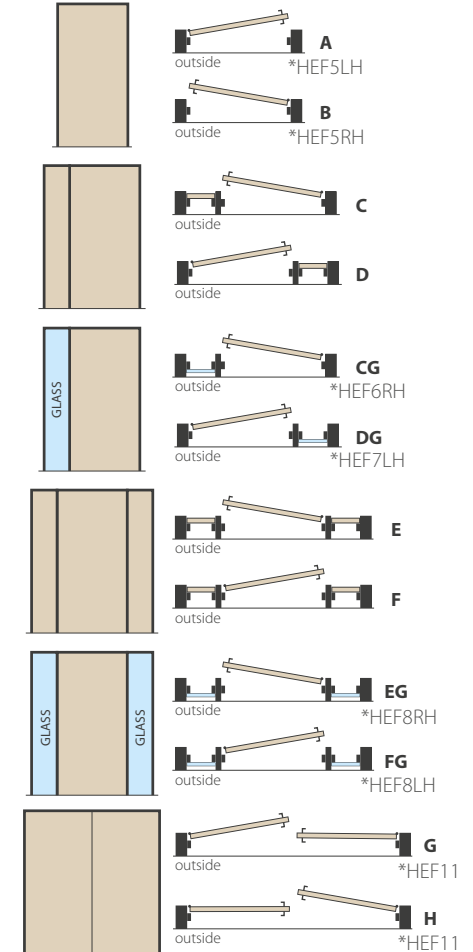

\*Victoria Configuration Codes


■ Durable Anodised Aluminium Plate

A strong and sleek bottom seal. Designed with energy efficiency and weather protection in mind



REBATED

For pairs of doors to eliminate draughts, noise, etc. Reduces the width of a pair of doors by 12mm.



MUSHROOM STOP

Mushroom stop is an alternative to rebated doors for pairs of doors to eliminate draughts, noise etc. Increases the width of a pair of doors by 12mm.

DOORS NOT INCLUDED

- Door cost is additional
- Choose from any door in our entrance range
- Order door and frame together to ensure perfect fit (Recommended)
- Door is supplied with machine cut outs for hinges when ordered with frame
- Hinges are additional cost in Victoria
- Multiblade Rubber Seal is an additional cost in Victoria






■ Factory Assembled Frame

Fully assembled, factory fitted hinges and packaged ready for your home. Our frames have been designed to suit most openings

■ Timber Jamb & Head

Made of premium timber and designed to suit Australian conditions. Choose from primed pine, meranti or merbau to best suit your situation and door choice

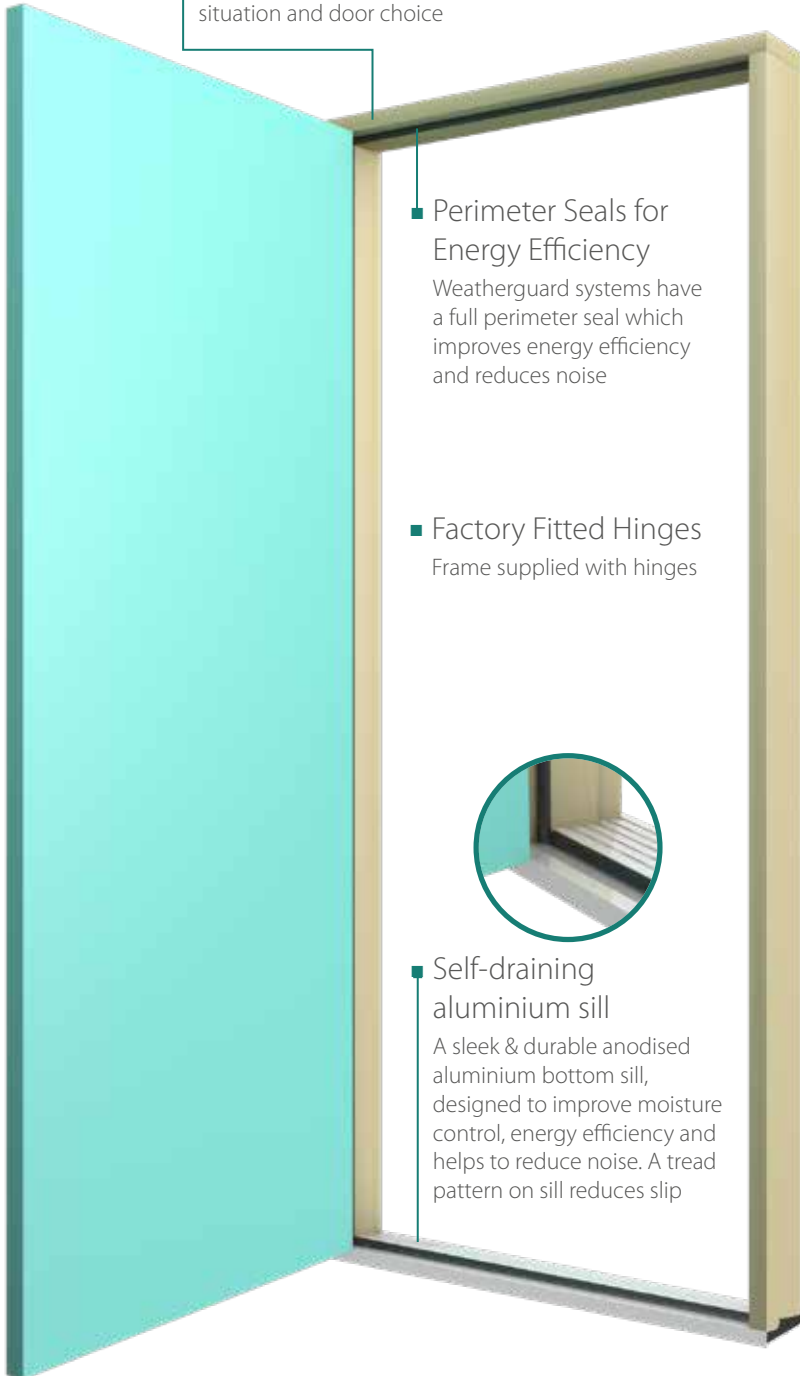

■ Perimeter Seals for Energy Efficiency

Weatherguard systems have a full perimeter seal which improves energy efficiency and reduces noise

■ Factory Fitted Hinges


Frame supplied with hinges



■ Self-draining aluminium sill

A sleek & durable anodised aluminium bottom sill, designed to improve moisture control, energy efficiency and helps to reduce noise. A tread pattern on sill reduces slip

HANDING OF FRAME

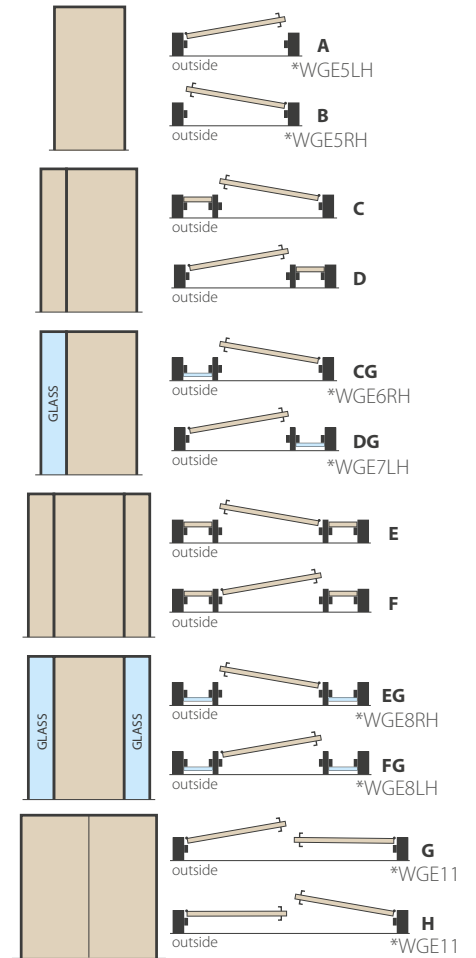

\*Victoria Configuration Codes


Specifications

	Rw:31	STC:31
	BAL12.5 (Meranti frames only)	



REBATED

For pairs of doors to eliminate draughts, noise, etc. Reduces the width of a pair of doors by 12mm.



MUSHROOM STOP

Mushroom stop is an alternative to rebated doors for pairs of doors to eliminate draughts, noise etc. Increases the width of a pair of doors by 12mm.

DOORS NOT INCLUDED

- Door cost is additional
- Choose from any door in our entrance range
- Order door and frame together to ensure perfect fit (Recommended)
- Door is supplied with machine cut outs for hinges when ordered with frame
- Hinges are additional cost in Victoria



# ALFRESCO MULTIFOLD



- **Secure & lockable**  
Keyed drop bolts fitted as standard



- **Adjustable Door Height**  
Easy door adjustments without having to remove the door panels




- **Sealed Gaskets**  
High-quality gaskets at frame joints for superior sealing



- **Perimeter Seals**  
Full perimeter seal which improves energy efficiency and reduces noise

- The warmth and natural beauty of timber doors
- Moisture draining system for excellent weather performance
- Durable roller system for smooth panel operation
- Preassembled for ease of installation
- Low E glazing option for increased energy efficiency

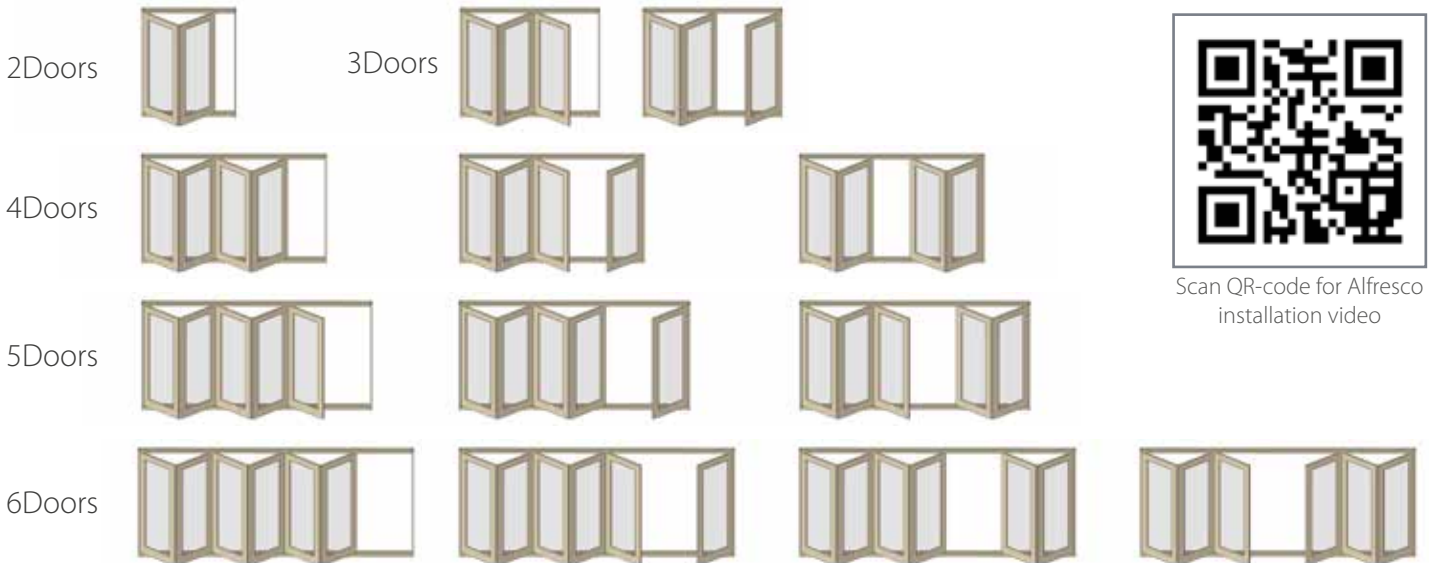

Scan QR-code for Alfresco installation video


■ All options shown above are also available in reverse



Hume Doors & Timber has extensively tested our comprehensive range of doors and door frame systems to meet the AS1530.8.1 criteria set for buildings in Bushfire Attack Level (BAL) zoned areas. All our BAL tests are conducted in Australia by an independent third-party fire testing consultancy firm.

Doors must be installed as per AS3959 to conform to BAL compliance. Refer to our website for further information: [www.humedoors.com.au](http://www.humedoors.com.au)

Bushfire Attack Level (BAL) measured in increments of radiant heat expressed in kilowatts /m2. This defines your BAL Rating requirement. The diagram below shows the BAL ratings along with the radiant heat flux for each zone.

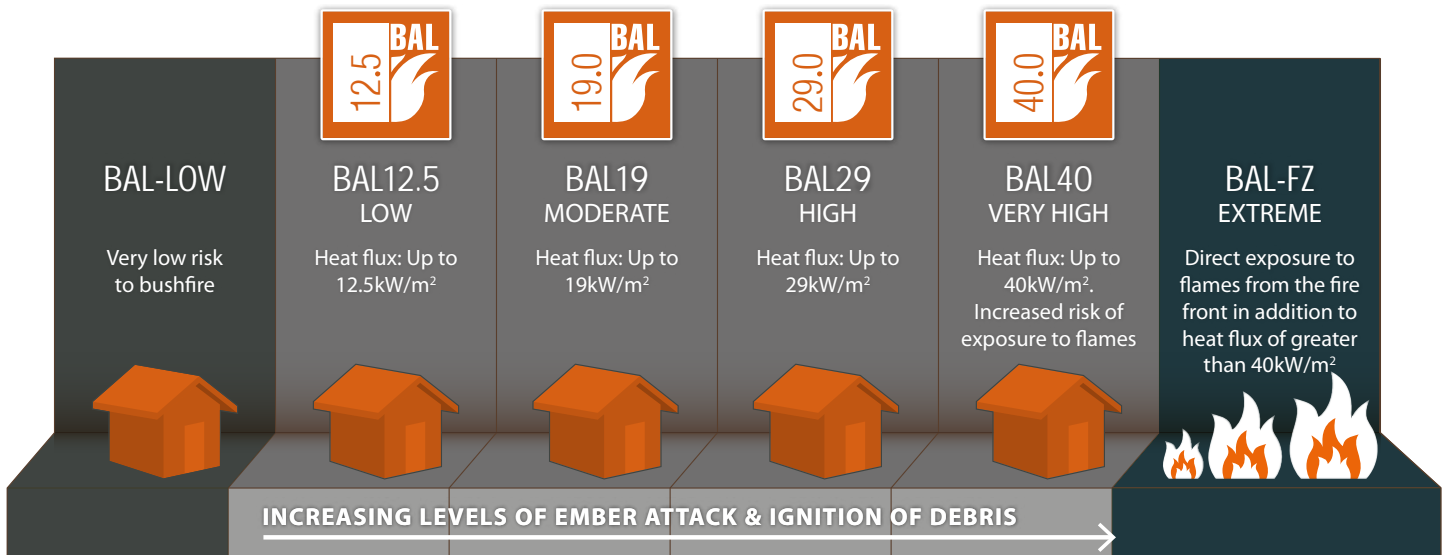

Check specifications tables for each range to see BAL ratings



# BAL19 & BAL29 DOORS




## Face Options



## 6mm Toughened Glass Options



## BAL19 & 29 Glazing Profile



## Specifications

	Solid HMR MDF Core (DB)		
	Unglazed	Rw:30	STC:29
	Glazed	Rw:31	STC:31
	BAL19 & 29		
	40kg		

- Door thickness is 40mm
- We recommend ordering Door & Frame together to ensure compliance with BAL
- A minimum of 3 x 100mm square butt hinges for doors up to 2040x820mm. For doors over this size 4 x 100mm square butt hinges are required
- BFR9 only Routed: Both sides
- BFR13 only Moulding: One side





## ■ Factory Assembled Frame

Fully assembled with an intumescent fire & smoke perimeter seal compliant to BAL19 & 29, the seal is removable for painting and is easily reinstalled. Frame has factory fitted hinges

## ■ Timber Jambs & Head

Made of premium hardwood. BAL19 & 29 Weatherguard entrance frames are suited for bushfire zones BAL12.5, 19 & 29 when installed as per AS3959

## ■ Perimeter Seal

BAL19 & 29 Weatherguard systems have a full intumescent fire & smoke perimeter seal that is BAL compliant

## ■ Factory Fitted Hinges


Frame supplied with hinges



## ■ Self-draining aluminium sill

Non-combustible aluminium sill with a generous tread pattern that helps to reduce slips. Self-draining and supplied with protective tape for protection during the construction/installation process

### HANDING OF FRAME

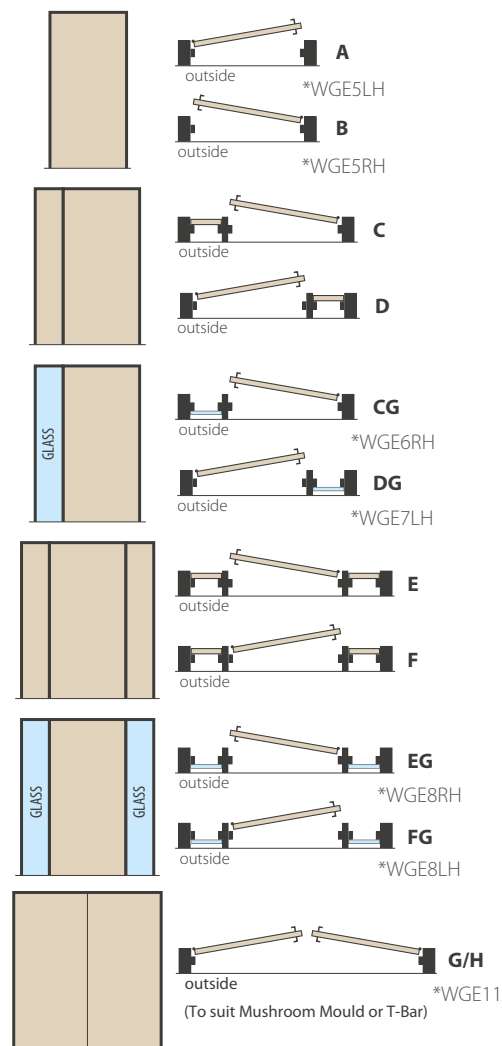

\*Victoria Configuration Codes

- BAL19 & 29 Merbau Weatherguard entrance frames are suited for bushfire zones BAL12.5, 19 & 29 when installed as per AS3959
- We recommend ordering Door & Frame together to ensure compliance with BAL. Choose from any door within the BAL19 & 29 door range
- Hinges supplied with frame
- Door is supplied with machine cut outs for hinges when ordered with frame
- CG\DG & EG\FG frames are glazed using 6mm toughened glass and must be screened with a BAL compliant screen as per AS3959 (screen not included)

## Specifications

	Rw:31	STC:31
	BAL19 & 29	



# BAL40 DOORS




### Face Options



### 6mm Toughened Glass Options





### BAL40 Glazing Profile




### Specifications

	BAL40 Construction	
	Rw:32	STC:30
	BAL40	
	45kg	

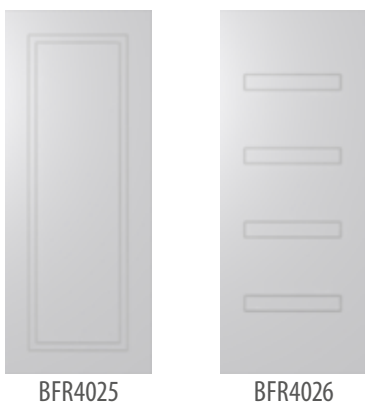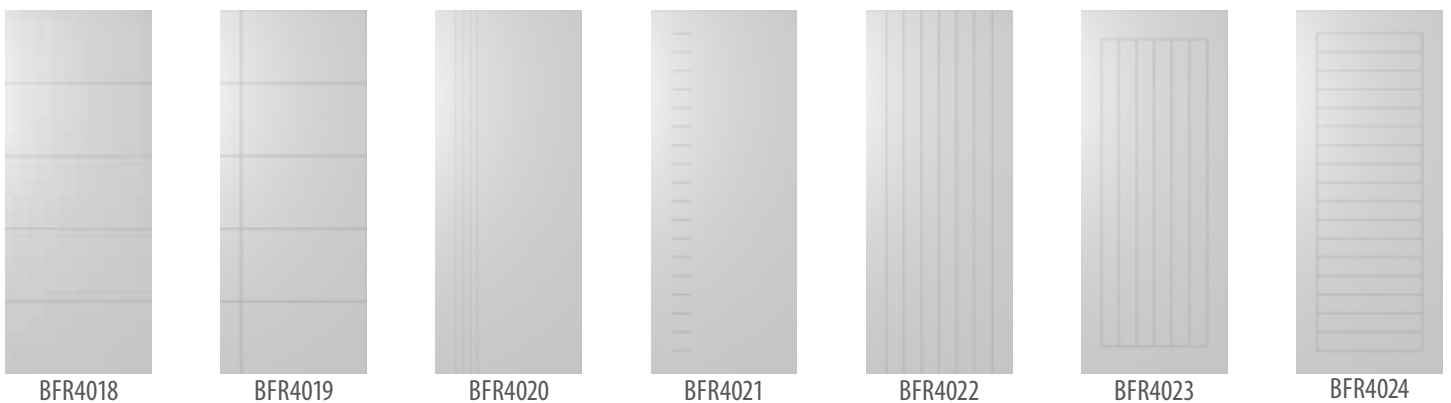

### Face Options



### Specifications

	BAL40 Construction	
	Rw:32	STC:30
	BAL40	
	45kg	


- Merbau not available for BFR4017
- Door & Frame must be supplied together to comply to BAL40 as tested to AS1530.8.1
- Door thickness is 45mm
- Door systems supplied with a minimum 4x100mm square butt hinges as tested to AS1530.8.1 and compliant to BAL40
- 6mm Toughened safety glass and double sided fire-resistant hardwood glazing bead as tested to AS1530.8.1



■ Factory Assembled Frame

Tested to AS1530.8.1 and compliant to BAL40. Our fully assembled BAL40 frames are factory fitted with 4 hinges. Frames are fitted with an intumescent fire & smoke perimeter seal

HANDING OF FRAME

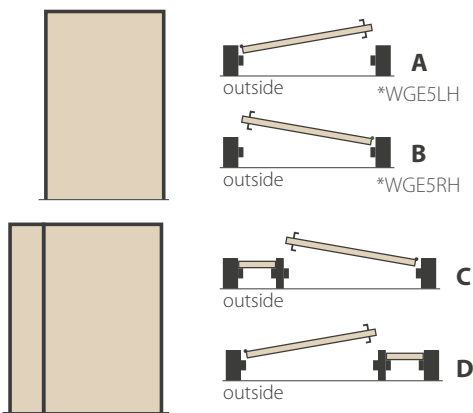

\*Victoria Configuration Codes



Watch our BAL40 burn test video.

■ Timber Jambs & Head

Made of premium hardwood. BAL40 Weatherguard entrance frames are tested to AS1530.8.1 and compliant to BAL40

■ Perimeter Seal

BAL40 Weatherguard systems have a full intumescent fire & smoke perimeter seal that is BAL compliant and tested to BAL40


■ Factory fitted with 4 Hinges

Frame supplied with hinges



■ Self-draining aluminium sill

Non-combustible aluminium sill with a generous tread pattern that helps to reduce slips. Self-draining and supplied with protective tape for protection during the construction/installation process

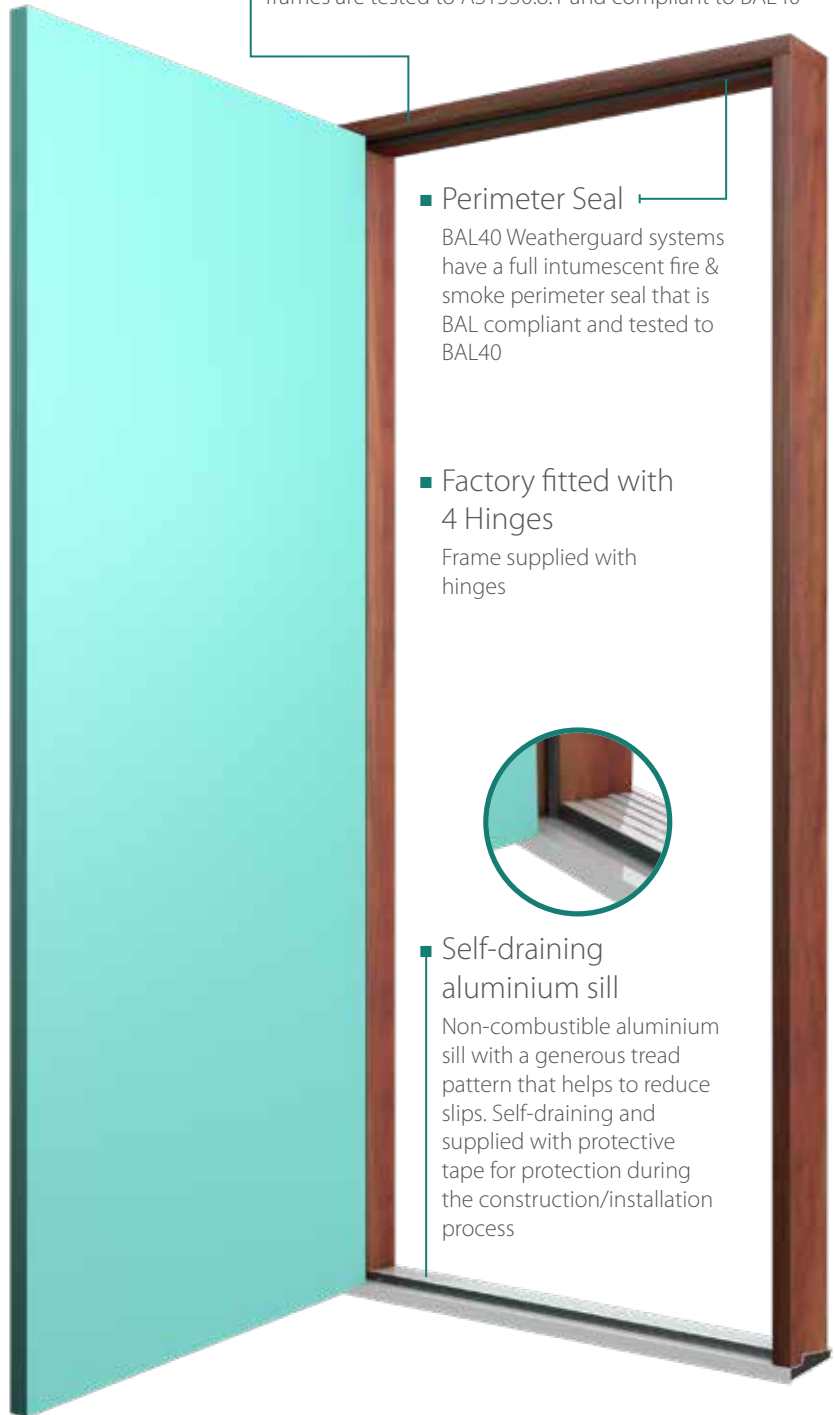

- Door & Frame must be supplied together to ensure compliance with BAL40
- Choose from any door within the BAL40 door range
- Door is supplied with machine cut outs for hinges
- BAL40 Merbau Weatherguard entrance frames have been tested to comply with BAL40 and are manufactured as per AS1530.8.1

Specifications

	Rw:31	STC:31
	BAL40	



INTERNAL BARN DOORS

# FRONTIER STANDARD BARN DOORS



FBDS1



FBDS2



FBDS3



FBDS4





FBDS5



Frontier  
Standard  
Profile

## Specifications

	Frontier Premium Hollow Core (SG)
	30kg

- Deep linear rout designs
- Available in PC MDF for paint or SPM for Stain
- Made to measure customised designs and sizing available





INTERNAL BARN DOORS

FRONTIER

ULTIMATE

BARN DOORS



FBDU1



FBDU2



FBDU3



FBDU4





FBDU5



Frontier  
Ultimate  
Profile

Specifications

	Frontier Ultimate Solid Infill Core
	48kg

- Frame and Infill constructed shaker style door
- Available in PCMDF for paint



INTERNAL BARN DOORS

FRONTIER

RUSTIC

BARN DOORS



FBDRG4  
(GREY)



FBDRB2  
(BROWN)





FBDRW4  
(WHITE)



Frontier Rustic  
Profile

### Specifications

	Frontier Rustic Solid Infill Core
	48kg

- PVC wrapped shaker style door
- Pre-finished
- Pre-Drilled roller holes & Grooved bottom rail
- Alignment of design on door is not guaranteed for pairs



INTERNAL BARN DOORS

# FRONTIER TRACK SYSTEM



- Powder Coated Track  
Architecturally designed premium track system with a powder coated finish
- Smooth & Quiet  
Nylon wheels allow for smooth and quiet rolling along a flat bar track
- Classic Barn Door Look  
Exposed steel straps
- Easy to Install  
Perfect for DIY



Scan QR code to see Frontier Barn Door Sliding System installation video






INTERNAL DOORS  
**HAMPTON**

Coastal, Raw & Elegant

Inspired by the elegant, coastal calm of the Hamptons. The Hampton Collection of doors is relaxed, coastal and quaint. Raw and natural lines conspire to give a "permanently on holiday" feel.



HAM1

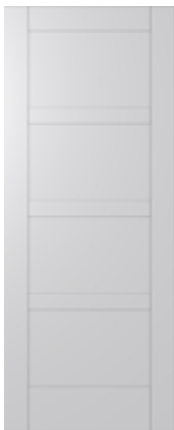

HAM4



HAM5



HAM6



HAM10



HAM12



HAM16

Face Options



Primed MDF  
(standard)

Glass Options



Clear



Translucent



HAM1  
(TRANSLUCENT)



HAM4  
(CLEAR)

All Hampton door designs are available with Translucent and Clear glass options

Specifications

	Hampton Construction (Internal)
	20kg

- Standard Door Size: 2040x520/620/720/770/820x35
- Check with your Hume state office for made to order



INTERNAL DOORS  
**STRATA**

Classy, Modern & Innovative

The Strata is unique and up to the minute in design, featuring eye-catching vertical and horizontal textured patterns. Complement your personality with a splash of creativity by adding a metallic strip. Strata doors are primed ready for painting.



HST1



HST4



HST5



HST1M



HST4M

All Strata Design doors are available in 2340mm high option



HST1  
2340mm High

Face Options



HST1



HST4



HST5



HST1M



HST4M



Details of Strata textured surface


Specifications

	Honeycomb Core (Hollow Core H1)	
	Rw:25	STC:25
	15kg	

- Standard Door Size: 2040x520/620/720/770/820x35
- Check with your Hume state office for made to order



The Humecraft is a range of high quality internal solid doors featuring broad square carved designs on both sides. Matching bi-folds add to their versatility. All models are solid construction.

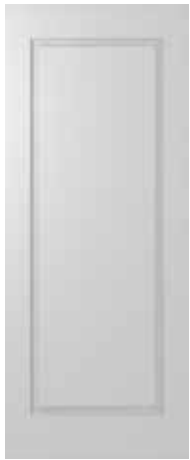

HMC1



HMC2



HMC4



HMC7



HMC8



HMC9



HMC10




HMC11

### Specifications

	Solid HMR MDF Core (HV Internal)	
	Rw:29	STC:29
	30kg	

- Standard Door Size: 2040x520/620/720/770/820x35
- Routed: Both sides (Excluding HMC11)
- For Bi-fold option refer to page 52
- Check with your Hume state office for made to order

### Face Options



Primed MDF  
(standard)



SPM

### Glass Options



Clear



Cathedral



Grey Tint



Translucent



Africana



Rice Paper





INTERNAL DOORS  
SORRENTO

Modern & Luxurious

The Sorrento brings that fresh contemporary feel to your home. The beautifully carved door designs feature on both sides and are produced on a deluxe primed door face.



SOR1



SOR2



SOR5



SOR6



SOR7




SOR8



SOR11




SOR12

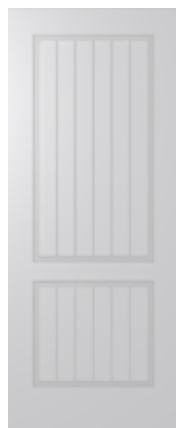

SOR22

Face Options



Primed MDF  
(6mm thick)

Specifications

	Honeycomb Core (Hollow Core SG) - 6mm Skin	
	Rw:27	STC:27
	18kg	

- Standard Door Size: 2040x520/620/720/770/820x35
- Routed: Both sides
- For Bi-fold option refer to page 52
- Check with your Hume state office for made to order



# INTERNAL DOORS JOINERY

## Class & Charm

Crafted from select timbers and available with a range of glass options to suit your style. The Joinery range features an engineered joinery construction system, which utilises traditional joinery methods as well as incorporating modern techniques.

Note: LIN1 doors with clear glass include a safety decal strip centre of the glass panel.



LIN1




LIN2



LIN10



SAV2

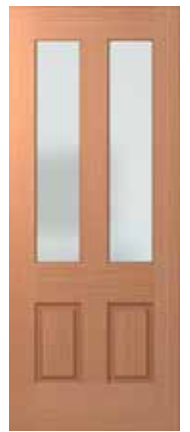

SAV3

### Face Options



SPM  
(standard)

Merbau  
LIN1

Tassie Oak  
LIN1

### Specifications

	Engineered Joinery
	30kg

Design Code	Standard Size (mm)
LIN1, LIN2, LIN10	2040x620/720/770/820x35
SAV2	2040x720/770/820x35
SAV3	2040x820x35

■ Check with your Hume state office for made to order

### Glass Options



Clear

Clear Laminate

Cathedral

Double Glaze Clear

Grey Tint

Translucent

Africana

Double Glaze Frost

Geostep

Rice Paper

For more glass designs refer to Glazing Options table on page 58



INTERNAL DOORS  
**LINEAR**

Striking, Unique & Stylish



Our designers have been inspired by modern European trends which have shaped the Linear Range of doors. This unique range can showcase the natural beauty of timber with the innovation of contrasting grains or can be painted for that fresh & stylish feel.



HLR210



HLR230



HLR240



HLR250



HLR270



HLR400



HLR410




HLR500



HLR600

### Face Options



Primed MDF  
HLR210, 230, 240 270  
(standard)



SPM  
HLR250, 400, 410, 500, 600  
(standard)

### Specifications

	Honeycomb Core (Hollow Core SG) - 6mm Skin	
	Rw:27	STC:27
	18kg	

Design Code	Standard Size (mm)
HLR230, 240, 250, 270, 400, 410, 500, 600	2040x520/620/720/770/820x35
HLR210	2040x620/720/770/820x35

- Routed: Both sides
- Not suitable for rebated pairs
- Alignment of horizontal rout is not guaranteed for pairs
- Check with your Hume state office for made to order

### Glass Options



Clear



Cathedral



Grey Tint



Translucent



Africana





INTERNAL DOORS

# MOULDED PANEL WOODGRAIN SKIN

## Classical & Timeless

These beautiful doors feature woodgrain embossed pre-primed faces to both sides and with so many different styles to choose from the Moulded Panel range has it all.



### OAKFIELD



OAK-G  
(HONEYCOMB)



OAK (HONEYCOMB)  
XB2 (SOLICORE)

### CAPRICE



CAP (HONEYCOMB)  
XB11 (SOLICORE)

### PACIFIC



PAC (HONEYCOMB)  
XB1 (SOLICORE)

### DENMARK



DEN (HONEYCOMB)  
XB6 (SOLICORE)

### Face Options



Moulded Panel  
Woodgrain Skin

### Glass Options



Clear

Cathedral

Grey Tint

Translucent

For more glass designs refer to Glazing Options table on page 58

### Specifications

	Honeycomb Core (Hollow Core H1)			Solicore Particle Board Core	
	Rw:25	STC:25		Rw:30	STC:29
	15kg			30kg	

- Standard Door Size:  
2040x410/420/460/520/620/720/770/820x35  
2040x720/770/820x35 (OAK-G)
- For Bi-fold options refer to page 52
- Check with your Hume state office for made to order



INTERNAL DOORS

# MOULDED PANEL SMOOTH SKIN

## Traditional & Refreshing

These beautiful doors feature embossed smooth faces both sides in a range of refreshing designs plus the benefit of 2340 high doors with our Ascot model. With so many different styles to choose from the Moulded Panel range has it all.



### ASCOT



### Glass Options



For more glass designs refer to Glazing Options table on page 58

### HAYMAN



### Face Options



Moulded Panel  
Smooth Skin

### Specifications

	Honeycomb Core (Hollow Core H1)			Solicores Particle Board Core	
	Rw:25	STC:25		Rw:30	STC:29
	15kg			30kg	

- Standard Door Size: 2040x720/770/820x35 (ASC-G), 2040x410/420/460/520/620/720/770/820x35, 2340x620/720/770/820x35 (ASC)
- For Bi-fold options refer to page 52
- Check with your Hume state office for made to order



INTERNAL DOORS  
**ACCENT**

Elegant & Fashionable

The Accent internal door has trendy horizontal and vertical designs which creates a straight forward style to suit any architectural theme.



HAG9  
PRE9



HAG11  
PRE11



HAG12  
PRE12



HAG14  
PRE14



HAG18  
PRE18



HA4  
PRE4




HA5  
PRE5



HA40  
PRE40

Face Options



Primed MDF  
(standard)



DuraXP

Specifications

	Honeycomb Core (Hollow Core H1)	
	Rw:25	STC:25
	14kg	

	Honeycomb Core (Hollow Core SG) 6mm Skin	
	Rw:27	STC:27
	18kg	

- Honeycomb Core (H1): HAG9, 11, 12, 14, 18, HA4, 5, 40
- Honeycomb Core (SG) 6mm skin: PRE9, 11, 12, 14, 18, 4, 5, 40
- Standard Door Size: 2040x520/620/720/770/820x35
- Routed: Both sides
- Check with your Hume state office for made to order
- Alignment of horizontal rout is not guaranteed for pairs.
- Not suitable for rebated pairs.

	Solicores Particleboard Core (SCX1 PCMDf)	
	Rw:29	STC:29
	30kg	



## FLUSH DOORS




# HONEYCOMB CORE

- Timber frame with light weight honeycomb core.
- Variety of face materials.

	Commercial Primecoat (PCSG) - 6mm Skin	
	Rw: 27	STC: 27
	18kg (2040x820x40mm)	

	Honeycomb Core (Hollow Core X1)	
	Rw: 25	STC: 25
	14kg (2040x820x40mm)	

	Honeycomb Core (Hollow Core H1)	
	Rw: 25	STC: 25
	14kg (2040x820x40mm)	




## FLUSH DOORS

# SOLICORE (SCX1)



	Sollicore Particleboard Core (SCX1)		
	35mm	Rw: 29	STC: 29
	40mm	Rw: 30	STC: 29
	45kg (2040x820x40mm)		




- Timber frame with water resistant particle/flax board core.
- Variety of face materials.

## FLUSH DOORS

# BLOCKBOARD (STPC)



	Solid Timber Pine Core (STPC Blockboard)		
	35mm	Rw:29	STC:29
	40mm	Rw:30	STC:29
	35kg (2040x820x40mm)		

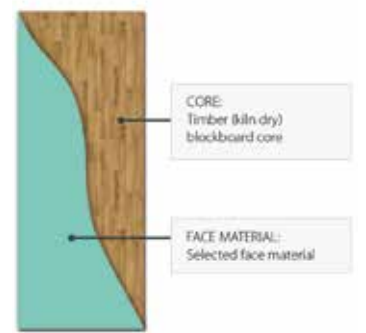

- Pine block core.
- Variety of face materials.

### IMPORTANT NOTE

- STPC doors are not recommended for exposed situations. Consider metal clad doors instead.
- Due to open ended core plate all surfaces must be sealed - OTHERWISE GUARANTEE VOID.
- Blockboard (STPC) are not recommended for high gloss paints due to potential core show-through. Sollicore (SCX1) doors are recommended as an alternative.





# INTERNAL SYSTEMS CAVITY UNITS

■ Recommended for 35mm doors only



### EVOLUTION TIMBER CAVITY UNIT OPENING SIZES

**A** = Door height + 70mm (QLD, WA)

**A** = Door height + 80mm (NSW, VIC, ACT, SA, TAS)

Flush Pull opening width:

**B** = 2 x Door + 10mm (Flush pull\* the door protrudes 50mm)

Flush Jamb opening width:

**B** = 2 x Door + 60mm (Flush jamb the door is flush with split jamb)

- NOTE: Unit size is tight, allow extra space for packing when preparing the opening.
- Flush pull not available in QLD



Scan QR-code for Cavity installation video



Features	EVOLUTION TIMBER	EVOLUTION COMPLETE	EVOLUTION STEEL CAVITY (ASPIRE)	EVOLUTION STEEL COMPLETE (ASPIRE)
Available in plain or treated timber	✓	✓		✓
Same architrave height as a hinged door	✓	✓		✓
Smooth 4 Wheel Ball Bearing Carriages	✓	✓	✓	✓
Jump free U track - Smooth operation	✓	✓	✓	✓
Maximum door mass 70kg	✓	✓	✓	✓
Quick release mechanism	✓	✓	✓	✓
One Touch Release System		✓		✓
Soft Closer Technology		✓		✓
Tough Composite Split Jamb			✓	✓
Galvanised steel back posts slats & track - Termite resistant			✓	✓




## INTERNAL SYSTEMS

# CAVITY UNITS ADDITIONAL EXTRAS

- Add on options for Evolution Timber & Evolution Steel

SOFT CLOSER

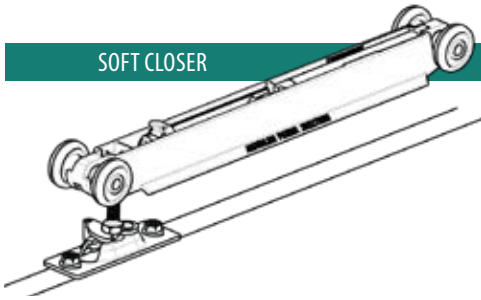


Scan QR-code for Soft Closer installation video



CAVITY TRACK DOOR STOP

(For double cavity application)



ONE TOUCH RELEASE



## INTERNAL SYSTEMS

# EVOLUTION PREMIUM



Floor to ceiling zero clearance Cavity Unit

- Floor to Ceiling Zero Clearance
- Creates large open living spaces
- Impressive large door openings
- Virtually invisible - hidden track system
- Soft closer - prevents door slamming
- One touch operation - push to release door

### IMPORTANT INFORMATION FOR PREMIUM CAVITY UNIT

MAXIMUM DOOR SIZE	3000x1300mm
MAXIMUM DOOR WEIGHT	100kg
STUD THICKNESS	90mm
SOFT CLOSER	Included as standard
OVERALL UNIT HEIGHT	Floor level (slab/sheet) to underside of ceiling + 50mm
OVERALL UNIT WIDTH	Door Width x 2 + 50mm
DOOR HEIGHT CALCULATION	Finished floor to underside of ceiling less 15mm for clearances
CLEARANCES	Under Door = 10mm Above Door = 5mm (Standard) (Can be adjusted to minimum 3mm)



Made to order

Evolution Premium is a fully customised solution.

Download the order form at:  
[www.humedoors.com.au/door-systems](http://www.humedoors.com.au/door-systems)



INTERNAL SYSTEMS  
SMARTROBE



PRIMECOAT



SPM



ACCENT  
(PAGE 46)



LINEAR  
(PAGE 42)



SORRENTO  
(PAGE 40)



HAMPTON  
(PAGE 36)



HUMECRAFT  
(PAGE 38)



STRATA  
(PAGE 37)



MIRROR ARCH TOP



FULL MIRROR



MOULDED PANEL  
WOODGRAIN  
(PAGE 44)



MOULDED PANEL  
SMOOTHSKIN  
(PAGE 45)



■ Space Saving Solution

Smartrobe sliding doors require very little space to open and convert your walls into a practical storage solution.

■ Stylish & Sturdy

We use our sturdy 35mm thick internal doors. This allows us to offer our full Internal Range of doors for sliding doors that fit perfectly into your home design.

■ Mirrored Doors Available

Choosing a mirrored finish makes your room appear larger while giving the room a lighter feel.

■ Smooth & Quiet

Each Smartrobe door includes two nylon wheels encased in steel assemblies



WHEEL ASSEMBLY



TOP TRACK



BOTTOM TRACK

Track Colour Options



White

Chrome

SMARTROBE CALCULATION TABLE

Door Height = Unit Height  
2040mm = 2115mm  
2340mm = 2415mm

Door Width (mm)	Number of doors	No finger Grips		Two Finger Grips per door	
		Unit Size Width (mm)	Stud Size Width (mm)	Unit Size Width (mm)	Stud Size Width (mm)
870	4	3460	3465	3670	3675
	3	2610	2615	2770	2775
	2	1760	1765	1870	1875
820	4	3260	3265	3470	3475
	3	2460	2465	2620	2625
	2	1660	1665	1770	1775
770	4	3060	3065	3270	3275
	3	2310	2315	2470	2475
	2	1560	1565	1670	1675
720	4	2860	2865	3070	3075
	3	2160	2165	2320	2325
	2	1460	1465	1570	1575
620	4	2460	2465	2670	2675
	3	1860	1865	2020	2025
	2	1260	1265	1370	1375
520	4	2060	2065	2270	2275
	3	1560	1565	1720	1725
	2	1060	1065	1170	1175

- Smartrobe doors and Smartrobe Track & Fittings should be ordered together for system operational purposes
- Doors are reversible (except mirror)
- Easy height adjustment. Access located at the bottom edge of the door.



Scan QR-code for Smartrobe installation video





Flush



BF1 PC MDF

BF1 SPM

Accent  
(Page 46)



BF HAG9

Sorrento  
(Page 40)



BF SOR1

Strata  
(Page 37)



BF HST1

- All designs in Accent, Sorrento & Strata ranges can be used for bi-folding solutions. Refer to relevant page.
- Refer to page number for matching doors.

Humecraft

(See page 38 for matching door designs)



BF29

BF30

BF35

Moulded Panel Smooth

(See page 45 for matching door designs)



ASCOT  
(BF27)

ASCOT-G  
(BF28)

HAYMAN  
(BF6)



Scan QR-code for Bi-fold installation video

Moulded Panel Woodgrain

(See page 44 for matching door designs)



CAPRICE  
(BF34)

PACIFIC  
(BF15)

OAKFIELD  
(BF18)

OAKFIELD-G  
(BF19)

DENMARK  
(BF26)

Glass Options



Clear

Cathedral

Grey Tint

Translucent

For more glass designs refer to Glazing Options table on page 58

- **OPENING SIZES:** Bi-folds are supplied to suit opening sizes of 2040x720/770/820
- **BI-FOLD SIZES:** Bi-folds are supplied in sizes of 2015x712/762/812
- All Bi-folds are supplied with track and fittings

BI-FOLD CONFIGURATION

Single Bi-fold



Double Bi-fold



CALCULATE OPENING HEIGHT FOR BI-FOLD

Leaf Height	2015mm
Allowance for track and fittings	23mm
Clearance under leaf for pivot (add extra clearance for floor coverings)	22mm
<b>Total opening height</b>	<b>2060mm</b>

CALCULATE OPENING WIDTH FOR BI-FOLD

Leaf width x number of leaves (eg 405 leaf x 2)	810mm
Clearance for each gap 3mm x 3	9mm
<b>Total width</b>	<b>819mm for 820mm opening</b>



INTERNAL SYSTEMS  
MULTI-FOLD



MF1 PC MDF



MF1 SPM

■ Multi-folds have same design options as Bi-folds. Refer to Bi-folds for more designs

OPENING HEIGHT FOR MULTI-FOLD SETS (mm)		
Leaf Height		2015
Allowance for track & fittings and under door clearance		60
<b>Total Height for Standard opening</b>		<b>2075</b>
OPENING WIDTH FOR MULTI-FOLD SETS (mm)		
(This example uses a four door application using 405mm leaves)		
Leaf width x number of leaves	(eg 405mm leaf x 4 leaves)	1620
Add 2mm between each leaf	(eg 4 leaves is 3x2mm)	6
Allow 6mm clearance at each jamb	(eg 2x6mm)	12
<b>Total width</b>		<b>1638</b>


- Standard Multi-fold leaf size: 2015x355/380/405x35
- Standard opening height: 2075mm
- Opening width: Refer to table below

MULTI-FOLD CONFIGURATION


4 LEAF SET: (2.0m track plus pack/s)



6 LEAF SET : (2.5m track plus pack/s)

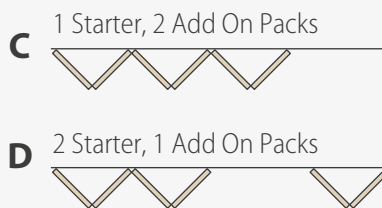

8 LEAF SET: (3.4m track plus pack/s)

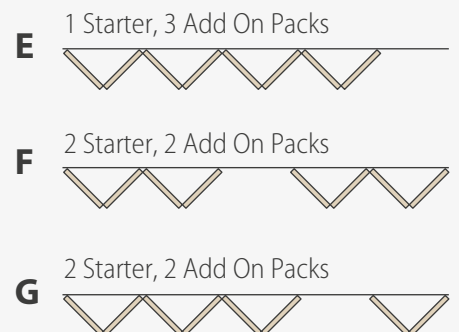



# INTERNAL SYSTEMS PRE-HUNG

## ■ Factory Pre-Assembled Frame

Factory Assembled System supplied in kit form with hinges already fitted. Made of premium materials and designed to suit Australian conditions.



## ■ Saves Time & Money

Quick & easy install. Recommended by Australia's leading builders.

## ■ Suits All Door Designs

Choose from any door in our Internal Range


## ■ Multiple Configurations

Single, Double, Triple & Four-door units available

### PRE-HUNG HANDING OPTIONS



Left hand hinged door



Right hand hinged door

### PRE-HUNG CONFIGURATIONS


#### Single Door Jamb Set



#### Double Door Jamb Set



#### Three Door Jamb Set



#### Four Door Jamb Set



- Doors and jambs sold separately.
- We recommend ordering door and jamb together to ensure a perfect fit
- Choose from any door in the Internal Range
- Doors supplied hinged only or hinged with pre-drilled face hole to take a handle. Available face hole sizes are 50/32/22mm
- Door is supplied with 2 knuckle half hinge. Jamb supplied with 3 knuckle half hinge plus pin

## Pre-hung Hinge Options



Chrome or  
Satin Chrome



Matt Black



Stainless Steel

- 89mm radius corner loose pin butt hinges
- Choose from chrome, satin chrome, stainless steel or black coloured hinges
- Liftoff hinges are available for water closets at no extra cost. Meets the Australian building code



Scan QR-code for Pre-hung installation video




# HOW TO HANG A DOOR

- Tools required – drill, screwdriver, chisel (25mm), hole saws (54mm and 25mm) tape measure, hammer, small wedges (2)
- If replacing an existing door, use this door as a template to locate hinges and face hole/s onto your new door. To measure a door, see Figure 1.
- Should a new frame be required, this may be purchased in either knock down or assembled from your Hume Doors & Timber stockist. If making your own frame, allow clearance for your door of 3mm at top and each side plus 5mm under door allowing for floor coverings, tiles, etc. It is important to ensure that your frame is square and plumb.
- Your new door may require planing to fit the opening. A maximum 3mm may be trimmed from any edge of the door.
- Hinges required – 2 hinges for internal doors (non solid), 3 or 4 hinges for solid and entrance doors, depending on door size. Locate and install hinges to jamb in desired locations. Measure hinge locations from jamb onto door (remember to allow clearance between top of door and frame). Chisel hinge cut outs into edge of door.
- Stand door into frame to check hinge locations are correct. Use wedges to adjust door height, locate other hinge leaf into door and screw into place with 2 screws per hinge.
- Your door should now swing freely. If any final adjustment is required, make these, fit remaining screws, and your door is ready to have door furniture installed. Fit door furniture as per manufacturers instructions.
- Door should now be removed, fully painted on all six surfaces as well as behind hinges (refer Care and Maintenance information) and then reinstalled into the opening and the door furniture refitted.




Scan QR code to watch video on how to hang a door

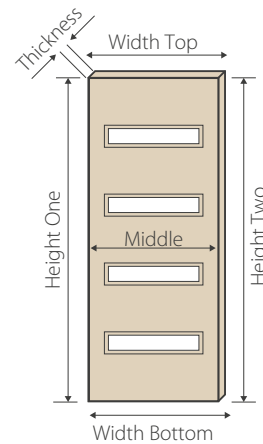


**FIGURE 1:**  
Measure existing door

- Check measure the height on both sides of the door.
- Then measure the width at the top, middle and the bottom of the door.
- Also measure the door thickness.

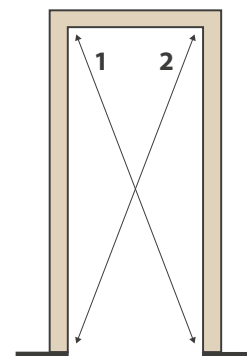

**FIGURE 2**

- Is the door frame square?
- Check by measuring diagonally as illustrated.
- If the frame is out of square, you may require a slightly larger door and trim it to size.
- A trimming allowance of up to 3mm is allowed on all doors.

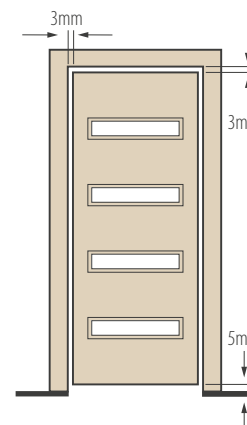

**FIGURE 3**

**Important:**

- Approximately 3mm clearance is required at the top and sides of the door.
- 5mm at the bottom (above the floor covering).





COMMERCIAL

## FIRE DOORS

■ 2 Year Guarantee



- TVC Firecore available in 1, 2, 3 & 4 hour rating
- Metal Inner Plates for Hinges, Lock & Closer
- Face Materials: MDF, PLY or Tempered Hardboard
- Vision Panels, Cladding & Air Grilles Available
- Fire rated Steel Door Frames Available



ROBAX VISION PANEL

COMMERCIAL

## COMMERCIAL PRODUCTS



METAL CLAD DOORS



AIR GRILLS



ALUMINIUM T-BARS



COMMERCIAL


# STEEL DOOR FRAME

■ 1 Year Guarantee




- Includes 3 hinges (Required to meet door guarantee for solid doors)
- Hinges screw fixed to frame to allow removal if required for easy door hanging
- Zinc finish, ready for priming or painting


## DOOR HANDINGS




## STEEL FRAME PROFILE

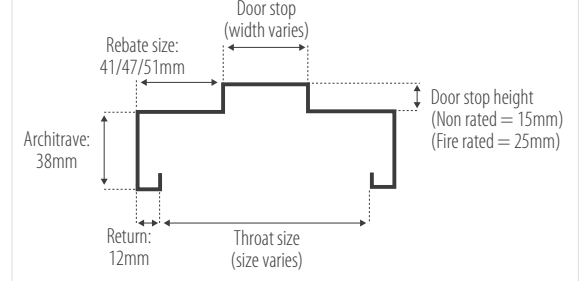

## ADDITIONAL EXTRAS

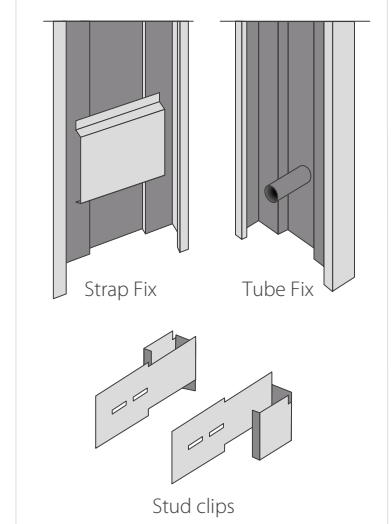

## PROFILE DETAILS

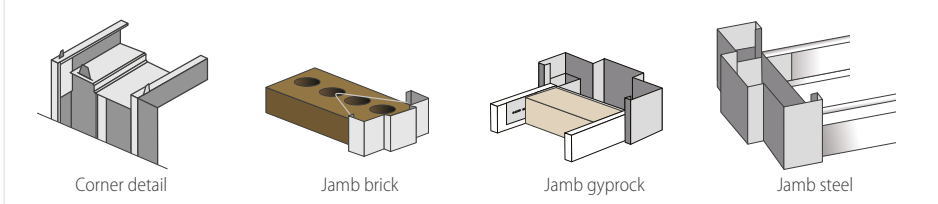



GLASS

# GLAZING OPTIONS

		FROST COLOURED DESIGN					GLASS OPTIONS				
--	--	-----------------------	--	--	--	--	---------------	--	--	--	--

- Square (■) denotes the glass available for this door or sidelight.
- Clear glass available for ALL doors and sidelites.
- Availability varies for each state.



Door Range	Design Code	Frosted Black Orchid	Frosted Rose Bud	Frosted Kookaburra Jewel	Kookaburra Green Leaves (Cathedral)	Wysteria (Cathedral)	Africana	Rice Paper	Translucent or Frost	Cathedral	Slumped
------------	-------------	----------------------	------------------	--------------------------	-------------------------------------	----------------------	----------	------------	----------------------	-----------	---------

**ENTRANCE**

Savoy1200	XS24, XS26, XS28, XS45						■	■	■	■	
Verve	VER1, VER4, VER6, VER11							■	■	■	
Linear (Entrance)	XLR120, XLR160						■		■	■	
Illusion	XIL1, XIL6						■		■		
	XIL21, XIL26						■		■		
Newington	XN6, XN12						■		■	■	■
	XN1, XN2, XN9, XN5, XN11, XN14, XN16						■	■	■	■	■
Nexus	XN7						■	■	■	■	■
	NEX30, NEX40						■	■	■	■	■
Savoy 820	NEX35, NEX36, NEX38						■	■	■	■	
	XS3, XS4	■	■	■	■	■	■	■	■	■	
Savoy 820	XS11						■	■	■	■	■
	XS24, XS26, XS28, XS45						■	■	■	■	
Joinery	JST1, JST2, JST11, JST12, JST4, JST5, JST6, JST10						■	■	■	■	
Regency	XR5, XR6			■	■		■	■	■		
Vaucluse Premier	XVP12, XVP13	■	■	■	■	■	■	■	■	■	
	XVP22						■		■	■	
Carringbush	XCB1, XCB2					■			■		
Glass Opening	XF1, XF3, XF8						■	■	■	■	

**INTERNAL**












Joinery/ Lincoln	LIN1, LIN10						■	■	■	■	
	SAV3	■	■	■	■		■	■	■	■	
Humecraft	BF30	■	■	■	■	■	■	■	■	■	
	BF35								■	■	
Moulded Panel	HMC11						■	■	■		
	OAK-G, BF19, ASC-G, BF28	■		■	■		■	■	■	■	
Linear (Internal)	HLR210								■		

- Glass colours are as accurate as modern photographic and printing processes allow.
- Glass images are not to scale.
- Factory glazed doors comply with glazing standards AS 1288-2006



GLASS

# GLAZING OPTIONS

GLASS OPTIONS	PANAMA	TRIPLE GLAZE LEADLIGHT							BUDGET LEADLIGHT		
											
Geostep	Panama	Triple Glaze Bevelled Jewel	Triple Glaze Bevelled Flower	Triple Glaze Classique	Triple Glaze Tear Drop	Triple Glaze Argyle	Triple Glaze Crystal Blue	Triple Glaze Budget 3 Diamond Bevel	Triple Glaze Budget Bevel Flower	Triple Glaze Budget Diamond Cluster	
■											
■											
■											
■											
■											
	■										
■											
■											
■											
			■	■	■						
	■	■		■	■	■	■	■	■	■	
							■	■			
■											
	■										
	■										
	■										





TIMBER

# FIBRE-CEMENT PRODUCTS



PRODUCT RANGE	Profile	Applications	Standard Width (mm)	Standard Length (mm)
4.5MM PRIMA FLEX	<p>Arrised Edge on all 4 sides</p>	Suitable for gable end cladding and eaves, carport and verandah linings	450/600 900 1200	2400 1800,2400,2700,3000 1800,2100,2400,2700,3000
6.0MM PRIMA FLEX	<p>Arrised Edge on all 4 sides</p>	Multi-purpose building boards for external cladding and heavy-duty eaves and ceiling linings.	900 1200	1800,2400,2700,3000 1800,2400,2700,3000
7.5MM PRIMA PLANK	<p>Square Edge</p>	Siding board that comes with a choice of smooth and traditional woodgrain finish.	230 300	4200 4200
7.5MM PRIMA BASE	<p>Square rebate on 2 long sides and 1 edge</p>	Premium substrate for external texture coating system.	900 1200	2400,2725,3000 2400,2725,3000
6.0MM PRIMA AQUA	<p>Square rebate on 2 long sides and sanded</p>	Water resistant internal linings and eaves lining board for perfect seamless and flush finish.	900 1200 1350	2400,3000,3600 1800,2400,2700,3000,3600,4200 2400,3000,3600
6.0MM PRIMA LATTICE	<p>Arrised Edge on all 4 sides</p>	For use on gable ends, screens, pergolas and fences. Available in both square and diamond pattern.	900 1200	1800,2400,3000 1800,2400,3000
6.0MM PRIMA CERAMIC TILE UNDERLAY	<p>Square Edge</p>	Underlay sheet with preprinted (optional) fixing points.	900 1200	1800 1800

- Check with your nearest PRIMA stockist for availability
- For more information visit [www.humedoors.com.au/fibre-cement](http://www.humedoors.com.au/fibre-cement)



TIMBER

# TIMBER MOULDINGS PROFILES



## PINETRIM PLUS - PRIMED

- Clear of defects
- Great workability
- Pre-primed and ready for painting



## PINETRIM<sup>XT</sup> H3 L.O.S.P. PRIMED TREATED PINE

- Pest Resistant
- Rot & Fungal Resistant
- Above ground external use



## MERANTI

- Natural warmth of solid timber
- Designed for staining
- Traditional and modern designs



## SILKTRIM

- Highly moisture resistant medium density fibreboard (HMR MDF)
- Safe to you and the environment (low formaldehyde levels) (E0)
- Innovative priming system - The very best formulations to provide the greatest pre finishing coat in the market



■ To view the full range of available profiles visit [www.humedoors.com.au/timber](http://www.humedoors.com.au/timber)



# GUARANTEE DOORS

Our products come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Subject to terms and conditions set forth herein, doors manufactured by: Hume Doors & Timber (Aust) Pty. Ltd., Hume Doors & Timber (Qld) Pty. Ltd., Hume Doors & Timber (Vic) Pty. Ltd., Hume Doors & Timber (SA) Pty. Ltd. or Hume Doors & Timber (WA) Pty. Ltd. (hereinafter referred to as "the Company") are guaranteed by the manufacturer for five years from the date of shipment by the manufacturer to be of good material and workmanship, free from defects which render them unserviceable or unfit for the use for which they were manufactured.

## TERMS AND CONDITIONS

Natural variations in the colour, texture or grain pattern of the wood or MDF are not to be considered defects. Doors must be accorded reasonable treatment by the purchaser and should be stored or hung in dry buildings and not in damp, moist or freshly plastered areas. The utility or structural strength must not be impaired in the fitting of the door, the application of hardware, or cutting and altering of the door for lights, louvres, panels or any special details. A maximum of 3mm may be trimmed from any edge of the door. This must be done evenly. Normal "show-through" of frame components in doors shall not be considered a defect. Entrance/solid doors up to 2040 x 820 require three hinges, larger doors require four hinges or pivot system. ENTRANCE DOORS & ENTRANCE SYSTEMS SHOULD BE HUNG IN WEATHER PROTECTED AREAS.

Doors and door systems including pivot systems that are installed in a fully exposed situation including opening out doors will not be warranted. Immediately after fitting and prior to hanging, the entire door including the top and bottom edges must be painted. Use a good quality paint or coating system and always follow the paint manufacturer's advice. Pay particular attention to internal vs

external paint systems and use the one appropriate to where you are hanging the door. This includes doors that are supplied raw or factory primed. If staining, must use exterior grade varnish/sealer to prevent absorption of moisture. Always follow the varnish/sealer manufacturer's advice.

SEMI GLOSS OR SATIN FINISHES ARE RECOMMENDED FOR ALL DOORS TO REDUCE "SHOW-THROUGH".

Exterior finishes to be applied strictly in accordance with paint manufacturers instructions. Entrance and exterior doors should be finished in light reflective colours to reduce the risk of heat absorption which may cause warping. DARK COLOURS MAY VOID WARRANTY. Regular maintenance should be provided to prevent deterioration. Where any legislation provides for remedies for the Company's breach of a condition or warranty whether statutory or otherwise, then, at the Company's option, the customer's sole remedy for such breach except a breach of Section 69 of the Trade Practices Act will be limited to: such remedy, or the repair of the products, or the replacement of the products or the re-supply of the products; or the payment of the cost of replacing the products; or the cost of having the services supplied again; or the re-provision of the services. No claim will be accepted unless notified in writing to the Company within seven (7) days of the date of delivery of the products or the supply of the services.

The Company will not be held responsible for additional charges of hanging, painting or other charges arising from the replacement of doors. Any such defects must be brought to the attention of the manufacturer when discovered and in any event within five years from the date of shipment by the Company. The Company is not liable to reimburse any purchaser for doors repaired or replaced without the prior written consent of the Company to such repair or replacement. The Company will not assume responsibility for doors which become defective because of failure to follow these conditions or hazards of shipment or storage, after doors leave the control of the Company. The Company will not be liable for any costs, claims, damages or demands arising from the personal injury, loss or damage whatsoever occurring to the customer or its agents, servants as a result of either acts or omissions of the customer. The Company will not be liable for any consequential loss or damage, whether due to its negligence or otherwise. The

Company will not be liable to the customer for the Company's failure to comply with its obligations to the customer due to any cause beyond the Company's reasonable control and the Company's obligations affected by such cause are suspended while the cause continues to prevent or hinder the Company's performance.

## ADVISORY NOTE

Considerable damage can occur during the delivery of doors particularly to country areas. "Special Packaging" is recommended (optional extra cost) in an attempt to prevent transit damage. The Company is not responsible for any transit damage.

## INTERPRETATION OF WARP

Warp shall be interpreted as meaning the cupping/bowing or twisting of doors. It refers to distortion within the door itself and not its relationship to the jambs or frame in which it is hung. Warp of 4mm or less for doors up to 2150mm high and 6mm or less for door heights between 2150mm and 2400mm shall not be considered a defect. Doors over 2400mm high or 1020mm wide are not guaranteed against warp.

## EXCLUSIONS

The guarantee against warp does not apply to the following:

- Doors with face veneers of different species.
- Doors that are improperly hung or do not swing freely.
- External flush doors which have been painted or stained dark colours, or different colours each face.

Experience has demonstrated that when warp occurs after doors have been delivered to storage or building sites, it is usually due to improper storage or adverse moisture conditions after hanging and not to faulty manufacture. The Company will accept no responsibility for doors when moisture content of the timber falls below 12% or exceeds 18%. The Company will not accept responsibility for conditions wholly beyond its control. However, the Company should be consulted promptly if excessive warping occurs to provide assistance in overcoming the difficulty.



# STEEL DOOR FRAME WARRANTY

Subject to terms and conditions set forth herein, steel door frames manufactured and/or supplied by: Hume Doors & Timber (Aust) Pty. Ltd., Hume Doors & Timber (Qld) Pty. Ltd., Hume Doors & Timber (Vic) Pty. Ltd., Hume Doors & Timber (SA) Pty. Ltd. or Hume Doors & Timber (WA) Pty. Ltd. (hereinafter referred to as "the Company") are warranted by the manufacturer and/or supplier for one year from the date of shipment by the manufacturer and/or supplier to be of good material and workmanship, free from defects which render them unserviceable or unfit for the use for which they were manufactured.


## THE COMPANY WARRANTS:

- Goods manufactured and/or supplied for a period of one (1) year as from the date of shipment, to be free from defects in material and workmanship which would render them unserviceable or unfit for normal use.
- To the extent permitted by law or the express provision of any statute or otherwise hereby expressly excluded and in respect warranties that cannot be so excluded, these terms and conditions shall be read such that those statutory warranties are read as being in additional to the warranties hereby given.
- Subject to Clause 2, the warranty in Clause 1 shall be read subject to the following matters being excluded as defects:

- Frames not accorded reasonable treatment by the customer.
- Damage or defects arising out of, or in connection with, shipment or storage after frames leave the control of the company (i.e. delivered to site or handed over to a carrier). Frames must be inspected by the customer for visible defects immediately upon delivery.
- Claims for non conforming deliveries (incomplete defective or incorrectly supplied) will only be considered if made within 3 working days of receipt or delivery of frames. All delivery checks are the responsibility of the customer.
- Under NO circumstance will the company be liable if frames are installed before checking that they are supplied correctly and are free from defects.
- Factory priming is only to protect frames in transport and general handling it is the responsibility of the customer to immediately on delivery of all frames apply 2 coats of compatible sealing priming to ensure corrosion or the like does not occur.
- It is the responsibility of the installer to ensure that the frames are installed plumb, square and suitably anchored using the correct fixing points.
- Storage and security of the frames is not the responsibility of the company.
- Stainless steel hinges are required to be maintained every 2 months to ensure prevention of tarnishing and corrosion.



# OVERHEAD PROTECTION

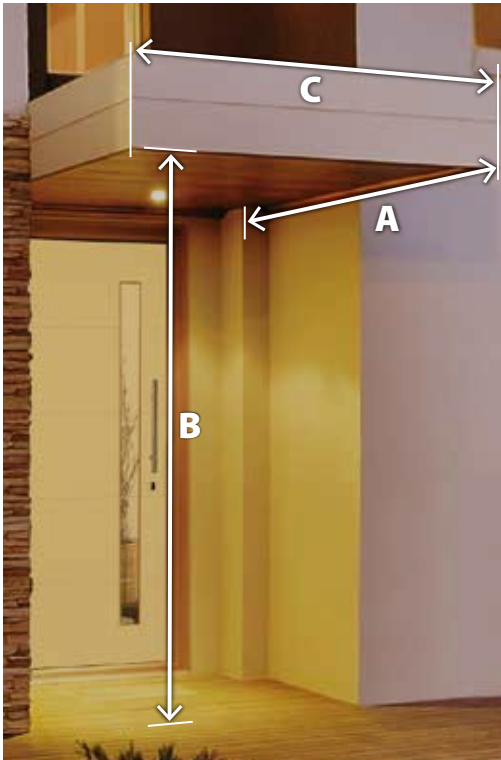

With Australia's climate extremes entrance doors will weather differently and timber doors are more susceptible to the elements than steel, aluminium or fibreglass doors.

Depending on your location and aspect the required overhead protection will vary. Tropical areas generally requiring more overhang than southern states.

The chart below will assist in determining the size of overhead protection which will vary depending on home design and adjacent walls.

Dimension 'C' – subject to adjacent walls – minimum width same width as entry frame

Note: colour choice for your exterior door will also affect weathering. Dark colours absorb heat, accelerating door deterioration, warping and bowing. For door guarantee refer page 62.

OVERHEAD PROTECTION CALCULATION				
Climate	North	South	East	West
Coastal	$A = 1/2 B$	$A = B$	$A = 1/2 B$	$A = B$
Tropical	$A = B$	$A = B$	$A = B$	$A = B$
Arid	$A = B$	$A = 1/2 B$	$A = B$	$A = 1/2 B$
Mild	$A = 1/2 B$	$A = 1/2 B$	$A = 1/2 B$	$A = B$



# CARE & MAINTENANCE

- Your timber door may be affected by changes in temperature, moisture and location. After selecting and purchasing your Hume door, store flat in a dry, well-ventilated area before installation.
- Before fitting the door, all six door surfaces should be sealed initially then after installation painted, stained or clear finished with good quality products. Follow the paint manufacturer's instructions with the correct number of coats on ALL surfaces.
- Light reflective colours are recommended for Entrance Doors to reduce the possibility of bow, twist or warp. Dark colours may void Hume guarantee. Semi-gloss finishes are recommended. Paint with a light reflectance value (LRV) finish greater than 50 should be used on external doors. White – LRV approx 95, Black – LRV approx 5.
- Use the same colour on all six door surfaces. Different colours may cause doors to warp.
- Entrance Doors require overhead protection.
- Location and fitting of your door furniture can depend on door construction. Solid doors (doors rated for BAL12.5, BAL19, BAL29 & BAL40) may have door furniture installed at any selected height, either side of the door.
- Door maintenance is necessary for long term performance and periodic inspections are recommended. At the first signs of deterioration, your door should be properly refinished. Make sure that all surfaces of the door receive proper resealing and painting.
- To clean your door, use a damp cloth. Do not hose or use chemicals or abrasives on your door. Lightly oil hinges and door furniture for optimum performance.
- Contact your nearest Hume Doors stockist or the Hume Doors website for more information.





# CONTACT DETAILS



HUME DOORS  
& TIMBER

## NEW SOUTH WALES



**HUME DOORS & TIMBER – (AUST) PTY LTD**  
ABN 39 001 472 493

**Sydney Office & Showroom**  
120 Hume Highway, Lansvale NSW 2166  
PO Box 333, Cabramatta NSW 2166  
P | 02 9794 1111 F | 02 9794 1199  
E | [info@humedoors.com.au](mailto:info@humedoors.com.au)

**Port Macquarie Branch**  
No. 2 Belah Road, Port Macquarie NSW 2444  
P | 02 6581 0011  
F | 02 6581 0091  
E | [pmsales@humedoors.com.au](mailto:pmsales@humedoors.com.au)

**Newcastle Branch**  
7 Waterloo Avenue, Thornton NSW 2322  
P | 02 4966 8880  
F | 02 4966 8881  
E | [nclsales@humedoors.com.au](mailto:nclsales@humedoors.com.au)

## QUEENSLAND



**HUME DOORS & TIMBER (QLD) PTY LTD**  
ABN 25 009 994 996

86 – 92 Mudgee Street, Kingston QLD 4114  
PO Box 2243, Logan City D.C. Qld 4114  
P | 07 3489 6200  
F | 07 3489 6299  
E | [sales@humedoorsqld.com.au](mailto:sales@humedoorsqld.com.au)

**Cairns Branch**  
4-6 Ponzo Street, Woree, QLD 4868  
P | 07 4041 2099  
E | [hdtcairns@humedoorsqld.com.au](mailto:hdtcairns@humedoorsqld.com.au)

**Sunshine Coast Branch**  
14 Junction Drive, Coolum Beach Qld 4573  
P | 07 5446 2640  
F | 07 5446 3530  
E | [hdtcoolum@humedoorsqld.com.au](mailto:hdtcoolum@humedoorsqld.com.au)

**Northern Territory Branch**  
3 Adams Road (Cnr Beresford),  
Yarrowonga NT 0830  
P | 08 8932 3733  
F | 08 8932 3799  
E | [hdtnt@humedoorsqld.com.au](mailto:hdtnt@humedoorsqld.com.au)

## VICTORIA



**HUME DOORS & TIMBER (VIC) PTY LTD**  
ABN 87 006 329 906

33 Remington Drive, South Dandenong VIC 3175  
PO Box 4236, South Dandenong VIC 3164  
P | 03 9799 6888  
F | 03 9799 9688  
E | [hdtvic@humedoors.com.au](mailto:hdtvic@humedoors.com.au),  
[timbersalesrep@humedoors.com.au](mailto:timbersalesrep@humedoors.com.au),  
[doorsales.vic@humedoors.com.au](mailto:doorsales.vic@humedoors.com.au),  
[vicquotes@humedoors.com.au](mailto:vicquotes@humedoors.com.au)

**Tasmanian Branch**  
5 Trotters Lane Prospect Tasmania 7250  
PO Box 393 Prospect Tasmania 7250  
T: 03 6774 9100  
E: [tassales@humedoors.com.au](mailto:tassales@humedoors.com.au)

## SOUTH AUSTRALIA



**HUME DOORS & TIMBER (SA) PTY LTD**  
ABN 34 007 512 209

89 Heaslip Road, Burton SA 5110  
PO Box 2037, Salisbury Downs SA 5108  
P | 08 8280 2000  
F | 08 8280 8099  
E | [hdtsa@humedoors.com.au](mailto:hdtsa@humedoors.com.au)

## WESTERN AUSTRALIA



**HUME DOORS & TIMBER (WA) PTY LTD**  
ABN 62 009 421 569

75 Briggs Street, Carlisle WA 6101  
PO Box 118, Welshpool WA 6986  
P | 08 9470 1800  
F | 08 9472 3802  
E | [hdtwa@humedoors.com.au](mailto:hdtwa@humedoors.com.au)

Disclaimer: Hume Doors & Timber reserves the right to alter or amend without prior notice, any data, dimensions and design details specified herein. Photographs or illustrations may not depict the exact design or specification and may vary to the actual product. Doors are supplied unfinished unless otherwise specified and routed doors have exposed MDF.