




**LUVIA**  **WOOD**  
Outdoor Cladding



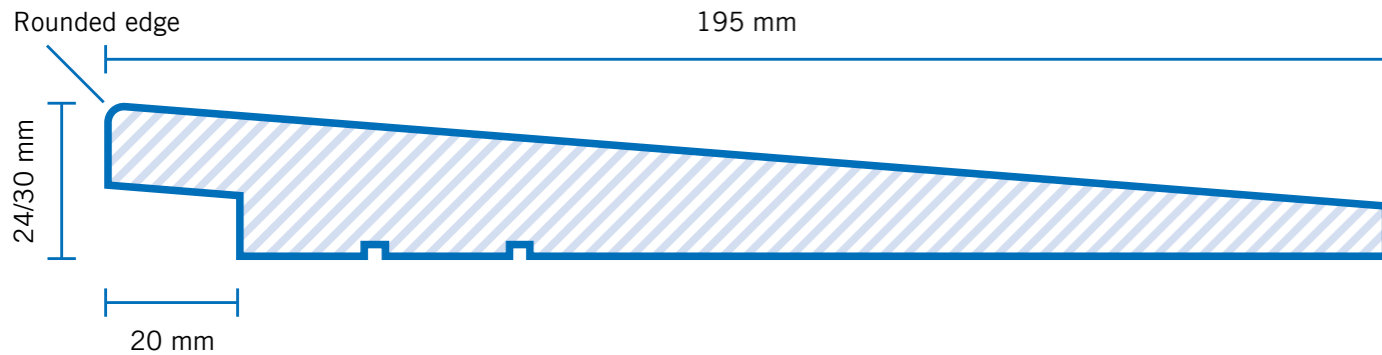

## LuviaWood Outdoor Cladding 1.

Thickness .....	9–24 mm
Width .....	195 mm
Length .....	3,6–5,4 m
Raw material .....	Spruce SF 38x200 mm
m/m2 .....	5,7
Fireclass .....	D2-S

## LuviaWood Outdoor Cladding 2.

Thickness .....	12–30 mm
Width .....	195 mm
Length .....	3,6–5,4 m
Raw material .....	Spruce SF 47x200 mm
m/m2 .....	5,7
Fireclass .....	D2-S


**10**  
YEARS  
WARRANTY



## Painted with care

The product is treated twice with Tikkurila Ultra Pro paint including required wood preservatives against rotten wood and mold.

The product is planed, split with band saw and immediately treated first time with Ultra Pro. This enables perfect adhesion between wooden surface and the paint itself. The cladding boards keep their original shape well when the total process time is as short as possible between the band sawing and the final packaging. The first treatment is done over the all 4-sides and the second treatment is for 3-visible sides. 10 year working guarantee for the painting applies when the LuviaWood Outdoor Cladding is used and assembled correctly.

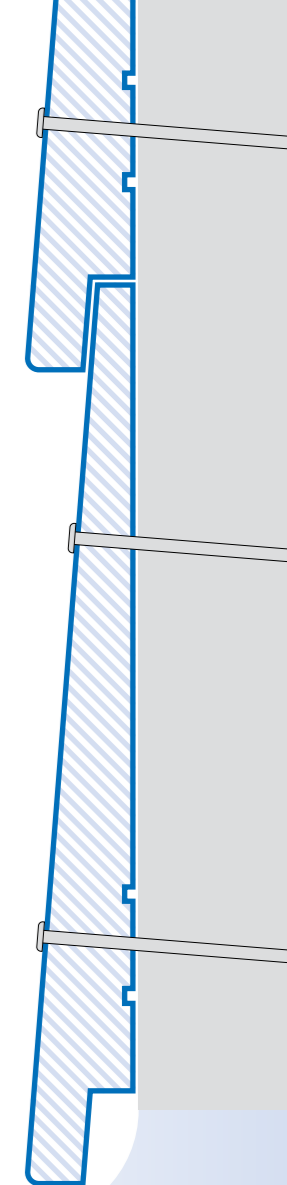

Leave min. 300 mm to the ground surface for air to flow.



**Wood is a living, renewable natural material. We know how Finnish wood grows and behaves in various conditions. We have genuine timber products for all surfaces.**



---

**LUVIAN SAHA OY**

Sahantie 1, FI-29100 LUVIA, FINLAND

[www.luviansaha.fi](http://www.luviansaha.fi)

