

# Laserlite® Accessories

...for a professional finish




- Fixings
- Infill strips
- Noise stop tape
- Back channel & infill strips

## Fixings

**Laserlite® One Shot® Time Saving Fixing System** saves 50% installation time as no pre-drilling is required. As a guide you will need approximately 7 fixings per lineal metre.

### Timber One Shot® Fixing




#### Specifications

- Coated to AS3566 Class 4
- 12 gauge
- 11 threads per inch
- Suitable for use with treated timber
- Type 17 (shape of tip)
- Suitable for use with 5/16" drive
- Cuts 11mm expansion hole
- Suitable for drill speed use - 1000rpm

#### Length available

	50mm	65mm
corrugated	✓	
greca	✓	
5 - rib		✓

### Steel One Shot® Fixing



#### Specifications

- Coated to AS3566 Class 4
- 12 gauge
- 14 threads per inch
- Suitable for battens .75-4.5mm thick
- Suitable for use with 5/16" drive
- Hex head
- Cuts 11mm expansion hole
- Suitable for drill speed use - 2000rpm

#### Length available

	60mm
corrugated	✓
greca	✓
5 - rib	✓

Select the quantity that suits your needs

**One Shot 50mm Timber**  
**One Shot 65mm Timber**

**One Shot 60mm Metal**  
**One Shot Standard Timber**  
**One Shot Standard Metal**





#### Profile

Corrugated, Greca  
5 Rib  
Corrugated, Greca, 5 Rib  
Corrugated, Greca, 5 Rib  
Corrugated, Greca, 5 Rib


#### Pack Size

50 packet | 250 tub | 1000 box  
50 packet | 200 tub | 500 box  
50 packet | 200 tub | 500 box  
50 packet  
50 packet

# One step easy installation



- 1.** Firmly place the sharp point of the One Shot fixing onto the crest of the corrugation to eliminate 'skidding or wandering'.
- 2.** Commence drilling at 1000rpm (timber) 2000rpm (steel) to pierce the sheet. Screw engages in timber or steel batten.
- 3.** Cutter engages polycarbonate sheet, cuts the expansion hole and centers the fixing.
- 4.** Wait until the rubber weather seal engages and compresses against the roof sheet and under the fixing head to stop.



## Eave Infill Strips

Prevent rain, dust and wind entering eaves

	LENGTH	COLOUR
Corrugated infill strips	920mm	white or black
Greca infill strips	940mm	white or black
5-Rib infill strips (top & bottom)	750mm	white or black




All infill strips come in packs of 4



## Noise Stop Tape

Reduces creaking



	LENGTH	COLOUR
Noise Stop Tape	20m	white



## Back Channel and Infill

Prevents leaking at walls and facias

	LENGTH	COLOUR
Back channel (Corrugated and Greca)	3.6m	grey
Back channel (5-Rib)	3.6m	grey
Back channel Infill Strip (Corrugated and Greca)	3.6m	white
Back channel Infill Strip (5-Rib)	3.6m	white

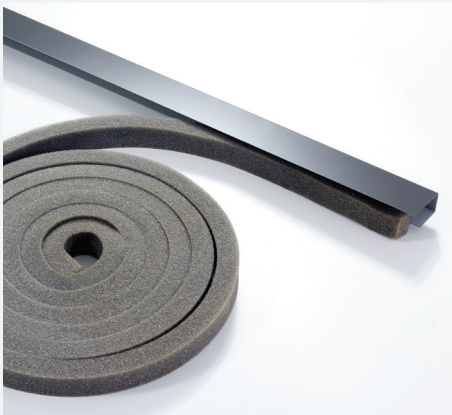

All back channnel infills come in packs of 1